


Fixture no: 9053
 Power: 2.7 W
 Test Date: 7/28/2017
 Beam Angle 50%: 117.9°
 Field Angle 10%: 165°
 CCT (Color Temp): 2977 K



CRI Value: 86.6
 R9 Value: 33.7
 Lm Delivered: 44.5 lm
 CBCP: 14.2 cd
 Power Factor: 0.92

SPACING RECOMMENDATIONS FOR OPTIMAL LIGHT DISTRIBUTION

CORRIDORS / HALLWAYS


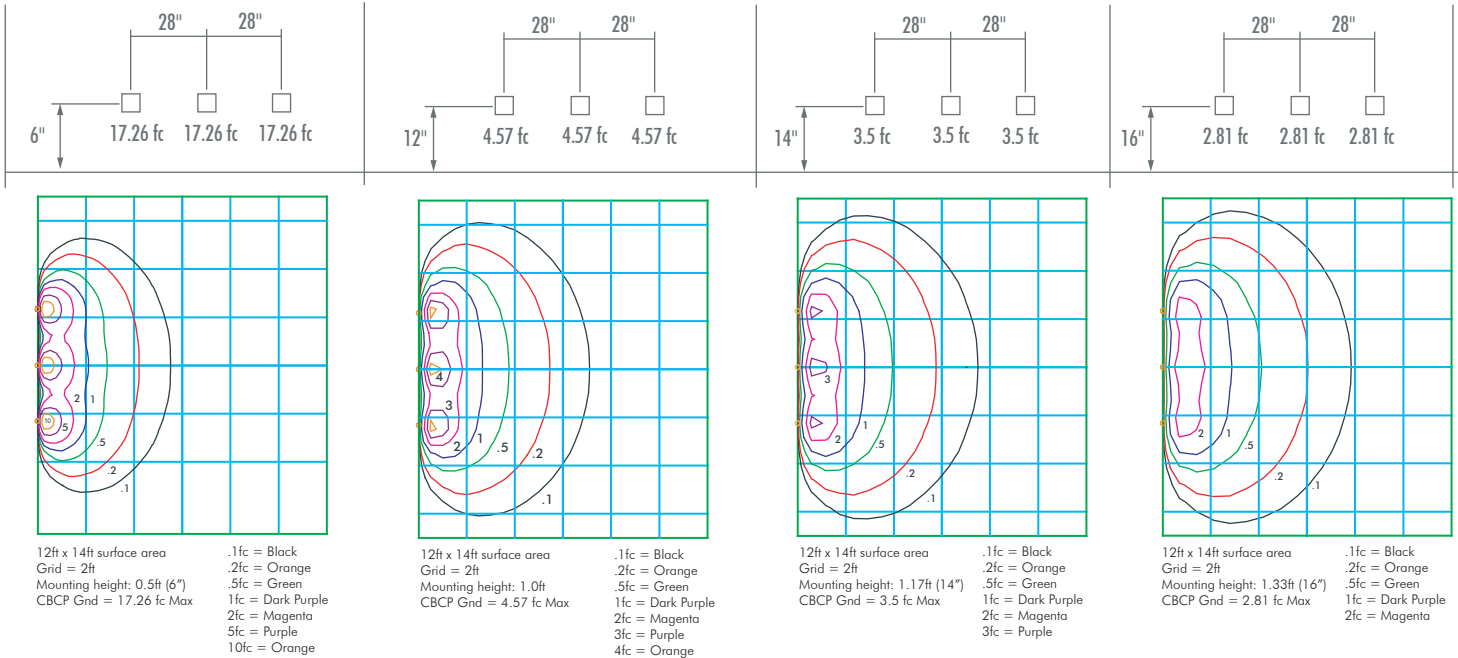


STAIRS - WALL MOUNT

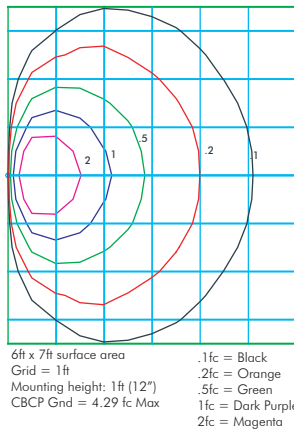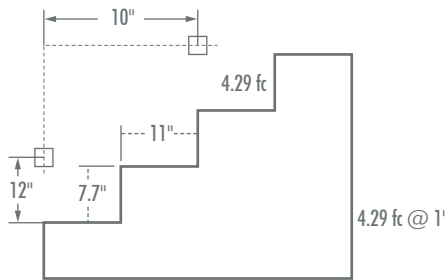

STAIRS - STEP MOUNT

Mount in center of stair as close to the upper tread as possible. For best results use one light per step for steps narrower than 5 feet.

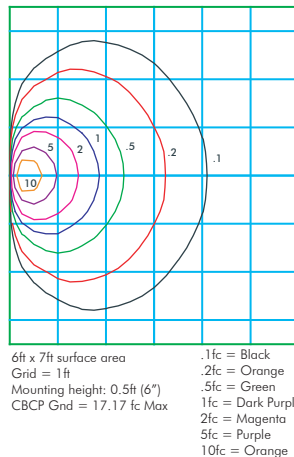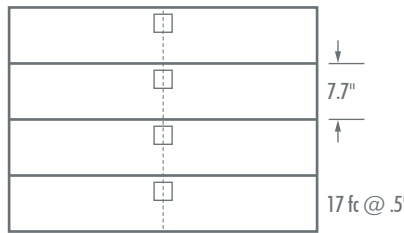

POLAR CURVE

