


Project Name:

Type:

Quantity:

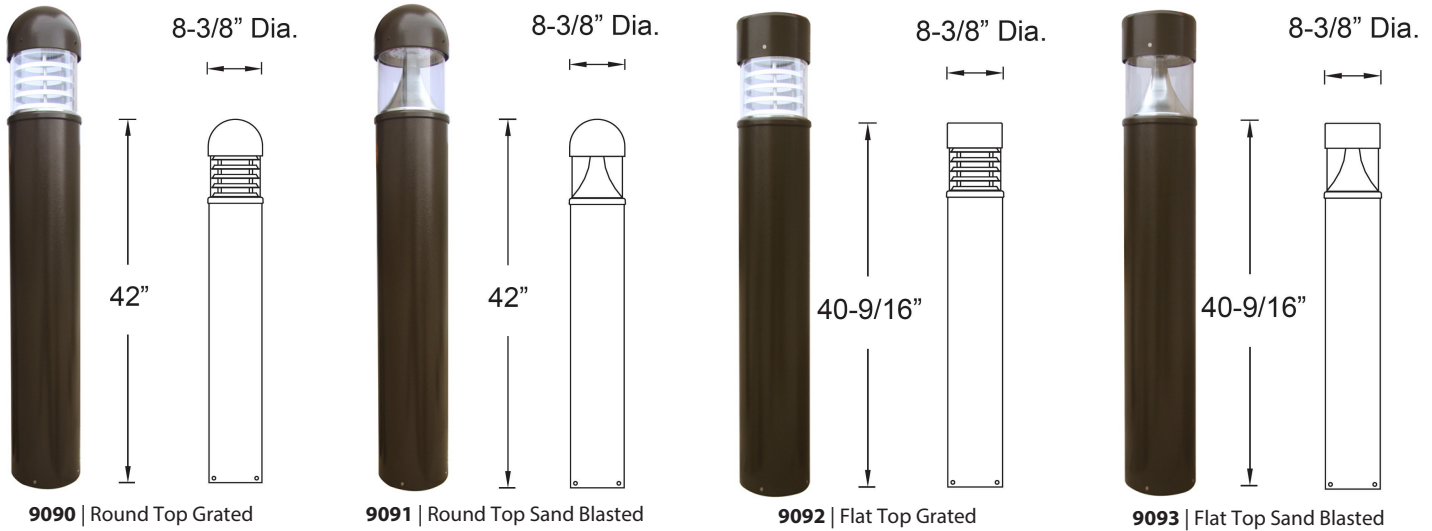

Alcon 9090 / 9091 / 9092 / 9093 Baliz LED 40-Inch High Efficiency Bollard Pathway Lighting

## FIXTURE SPECIFICATIONS

### INTENDED USE

The Baliz LED Round Top High Efficiency Bollard Pathway Lighting is designed as an energy saving replacement of Metal Halide and High pressure sodium lamps with a driver inside. The Baliz is an ideal solution for providing effective lighting for perimeter areas, public spaces, and other varieties of exterior spaces.

### AVAILABLE FINISHES

Standard	Dark Bronze	RAL #8019
Non-Standard	<i>Set up fee and longer lead time will be applied on non-standard finishes.</i>	
	Jet Black	RAL #9005
	Dark Grey	RAL #7016
	Traffic Grey	RAL #7042
	White	RAL #9010

### ORDERING INFORMATION Example: (9090-30K-BR)

Model	Color Temp	Finish
<b>9090</b> Round Top Grated 25 watts   1325 lumens	<b>30K</b> 3000K <b>40K</b> 4000K	<b>BR</b> Dark Bronze <small>Standard</small> RAL #8019
<b>9091</b> Round Top Sand Blasted 25 watts   1925 lumens	<b>50K</b> 5000K	<b>GR</b> Dark Grey RAL #7016
<b>9092</b> Flat Top Grated 25 watts   1325 lumens		<b>JB</b> Jet Black RAL #9005
<b>9093</b> Flat Top Sand Blasted 35 watts   3220 lumens		<b>TG</b> Traffic Grey RAL #7042
		<b>WH</b> White RAL #9010

### FEATURES

**Construction:** Die-cast extruded aluminum gasketed housing, fully sealed to prevent leakage from outside, no hazardous materials in fixture

**Optics:** Aluminum louver is standard, U.V. stabilized polycarbonate cover

**Lens:** One-piece clear acrylic lens

**Reflector:** Grated for glare prevention

**Mounting:** Impact-resistant and leveling design

*Anchor Bolts and Base Plate Standard*

**Voltage:** 120-277 (50/60 Hz)

**Efficiency:** 92 lms/W

**CRI:** 70+

**Distribution:** 150°

**Life:** 50,000 Hours (L70)

**Operating Temperature:** -4°F (-20°C)-113°F (-20°C)

**Power Factor:** >0.95

**Warranty:** 5 Years

**Listing:** cETLus Listed, Suitable for Wet Location, Assembled in the USA

