

### FIXTURE SPECIFICATIONS

#### INTENDED USE

Our linear architectural LED lights come with a variety of color temperature, dimming, CRI and voltage options. Ideal for commercial, hospitality and residential interior lighting, this 2-inch lens opening fixture offers an RGBW and Bluetooth Light Mesh smart phone app for optimal performance and versatility. This linear fixture comes in standard lengths of 2ft, 3ft, 4ft, 6ft and 8ft and can be joined together for seamless runs of any length. Available with varying options in lumen output.

#### PRODUCT FAMILY



- 12100-20-P Pendant
- 12100-20-W Wall
- 12100-20-S Surface
- 12100-20-R Recessed

#### AVAILABLE LENGTHS



- 2FT, 3FT, 4FT, 6FT & 8FT
- Continuous Run | Consult Factory
- Custom Length | Consult Factory

#### FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel, painted finish with premium paint
- Continuous Run:** Full ability to tandem mount for continuous run application
- Indirect Pendant Mounting:** For most effective indirect lighting result, mount at no less than 18" from the ceiling
- Custom Design:** Offered with pre-fabricated and fully illuminated corners
- Lens:** Glare-free, frosted acrylic snap-in flat or 1/2" snap-in drop lens for even distribution
- Voltage:** 50/60 Hz Constant current 0-10V @ 120-277V, TRIAC & ELV @ 120V RGBW Tunable White @ 120-277V
- Dimming for Static Color:** 0-10V, TRIAC (Forward-phase), ELV (Reverse-phase) **RGBW**
- Smart Phone App:** Bluetooth App for iOS and Android (See Page 6)
- Life:** +60,000 Hours Reported L70 Hours @ 55°C
- Operating Temperature:** 4°F (-20°C) ~ 122°F (50°C).
- Warranty:** 5 years (Static Colors) and 3 years (RGBW & Tunable White) Carefree for parts & components (Labor not included)
- Listings:** cULus Listed, UL listed for damp location, DLC Listed, ADA compliant (Less than 4" off wall), Assembled in USA (ARRA) standard, Made in USA (BAA) optional

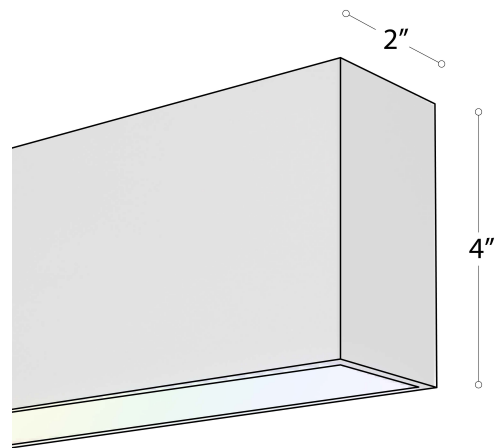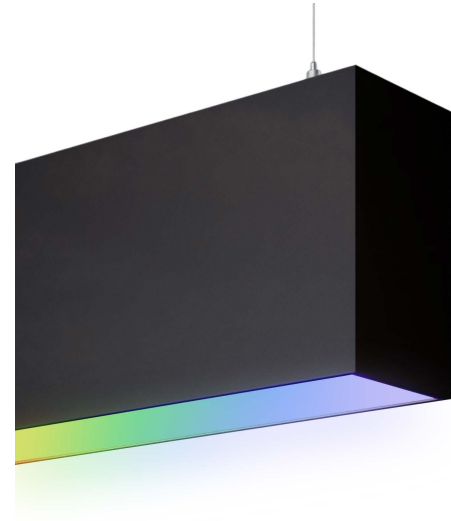

Alcon Lighting 12100-20 hitectural LED Linear Direct/Indirect Light

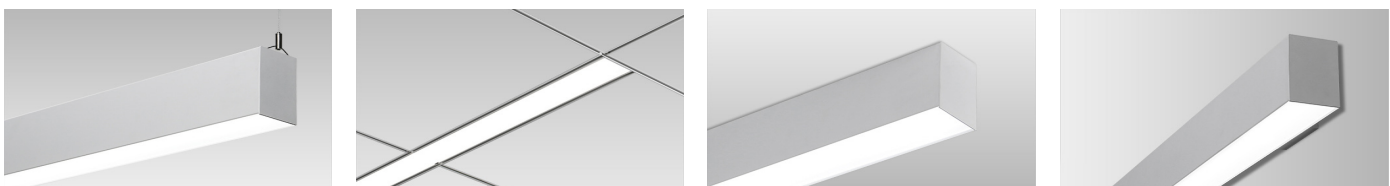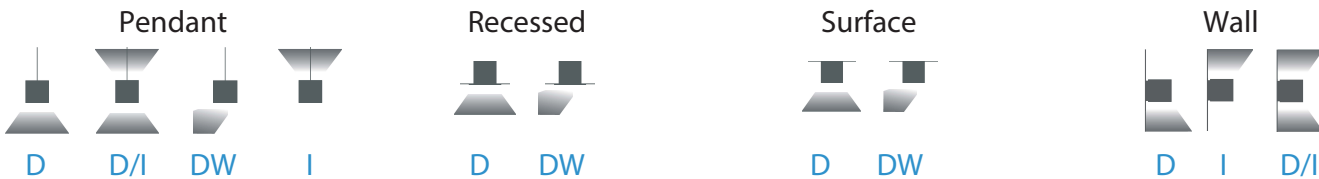

**ORDERING INFORMATION** Example: (12100-20-P-D-D4-S-4-27K-010-WH-WH-8-FL)

<b>MODEL</b>	<b>12100-20</b> 2.5" x 4"		
<b>MOUNTING</b>	<b>P</b> Pendant <b>W</b> Wall <b>S</b> Surface	<b>RT</b> Recessed T-Bar Grid <b>RS</b> Recessed Screw Slot Grid	<b>RF</b> Recessed Flanged <b>RTL</b> Recessed Trimless
<b>DOWNLIGHT OPTICS</b>	<b>D</b> Direct <b>DW</b> Direct Wallwash <sup>16</sup>	<b>DI</b> Direct / Indirect <b>DWI</b> Direct Wallwash / Indirect <sup>16</sup>	<b>I</b> Indirect Pendant Mounting
<b>DOWNLIGHT LUMENS</b> <i>Wattage &amp; Lumens per foot</i>	<b>STATIC WHITE</b> <b>D4</b> 4.5 Watts   640 lms <b>D6</b> 6.75 Watts   820 lms <b>D9</b> 9 Watts   1061 lms <b>D12<sup>21</sup></b> 12 Watts   1405 lms <b>D13</b> 13.5 Watts   1537 lms <b>Dx</b> Specify Lumens <sup>17</sup> (Min 113 lms - Max 2000 lms)	<b>TUNABLE WHITE</b> <b>TW-4</b> 4.5 Watts   640 lms <sup>14</sup> <b>TW-6</b> 6.75 Watts   820 lms <sup>14</sup> <b>TW-9</b> 9 Watts   1061 lms <sup>14</sup> <b>TW-12</b> 12 Watts   1405 lms <sup>14</sup> <b>TW-13</b> 13.5 Watts   1537 lms <sup>14</sup> <b>TW-DLO</b> 4.4 Watts   494 lms <sup>15</sup> <b>TW-DHO</b> 8.8 Watts   988 lms <sup>15</sup>	<b>RGBW<sup>13</sup></b> <b>RGBW-D9</b> 9.3 Watts   563 lms <b>RGBW-D18</b> 18.6 Watts   1126 lms
<b>UPLIGHT OPTICS<sup>19</sup></b>	<b>Blank</b> Not Required <b>CC</b> Clear cover for no optic	<b>15</b> 15° <b>30</b> 30° <b>60</b> 60°	<b>20</b> 20° Asymmetric <b>120</b> 120° Batwing
<b>UPLIGHT LUMENS<sup>1,2</sup></b> <i>Wattage &amp; Lumens per foot</i>	<b>STATIC WHITE</b> <b>Blank</b> Not Required <b>I4</b> 4.5 Watts   530 lms <b>I6</b> 6.75 Watts   733 lms <sup>3</sup>	<b>TUNABLE WHITE</b> <b>Blank</b> Not Required <b>TW-4</b> 4.5 Watts   530 lms <sup>14</sup> <b>TW-6</b> 6.75 Watts   733 lms <sup>14</sup> <b>TW-ILO</b> 4.4 Watts   494 lms <sup>15</sup> <b>TW-IHO</b> 8.8 Watts   988 lms <sup>15</sup>	<b>RGBW<sup>13</sup></b> <b>Blank</b> Not Required <b>RGBW-I9</b> 9.3 Watts   563 lms
<b>SHAPE</b> (Specify in Feet)	<b>S<sub>xxx</sub></b> Single Run <i>xxx = 2', 3', 4', 6' or 8'</i> <b>CR<sub>xxx</sub></b> Continuous Run <i>xxx = Length</i> <b>RC<sub>xxx</sub></b> Rectangle <sup>5</sup> <i>xxx = Width &amp; Length</i> <b>SQ<sub>xxx</sub></b> Square <sup>5</sup> <i>xxx = Width &amp; Length</i>	<b>X<sub>xxx</sub></b> Cross <sup>5</sup> <i>xxx = Leg 1 &amp; Leg 2</i> <b>T<sub>xxx</sub></b> Tee <sup>5</sup> <i>xxx = Top leg &amp; Base Leg</i> <b>U<sub>xxx</sub></b> U <sup>5</sup> <i>xxx = Base Leg &amp; Side Leg</i>	<b>90<sub>xxx</sub></b> 90° Angle <sup>5</sup> <i>xxx = Leg 1 &amp; Leg 2</i> <b>135<sub>xxx</sub></b> 135° Angle <sup>5</sup> <i>xxx = Leg 1 &amp; Leg 2</i> <b>CW<sub>xxx</sub></b> Ceiling to Wall <sup>5</sup> <i>xxx = Ceiling &amp; Wall</i> <b>CU</b> Custom <sup>5</sup>
<b>COLOR TEMPERATURE</b>	<b>STATIC WHITE</b> <b>27K</b> 2700K Warm White <sup>18</sup> <b>30K</b> 3000K Soft White <b>35K</b> 3500K Neutral White <b>40K</b> 4000K Cool White <b>50K</b> 5000K Daylight	<b>TUNABLE WHITE</b> <b>TW2750</b> 2700-5000K (Wired) <sup>7</sup> <b>TW2065</b> 2000-6500K (Wired) <sup>7</sup> <b>TW2762</b> 2700-6200K (Wireless) <sup>4,8</sup>	<b>RGBW<sup>13</sup></b> <b>RGBW30</b> RGB + W (3000K) <b>RGBW40</b> RGB + W (4000K)
<b>DRIVER</b>	<b>STATIC WHITE</b> <b>Blank</b> 0-10V (Dim to 1%) <sup>Standard</sup> <b>TRI</b> Triac (120V) <b>ELV</b> Electronic Low Voltage (120V)	<b>TUNABLE WHITE</b> <b>050</b> Tunable White 0-10V	<b>RGBW<sup>13</sup></b> <b>24V</b> 24V DC Power Supply <sup>8</sup> <b>DMX</b> 4-Channel DMX512 Decoder
<b>FINISH</b>	<b>WH</b> White (Matte) <sup>Standard</sup> <b>SL</b> Silver (Matte)	<b>BK</b> Black (Matte) <b>RAL#</b> Specify RAL # (Pg. 3)	
<b>PENDANT MOUNTING</b>	<b>Blank</b> Not Required	<b>AC4</b> 4' Adjustable Aircraft Cable <b>AC8</b> 8' Adjustable Aircraft Cable <b>ACx</b> Specify <i>x</i> ' in Feet (Max 30')	<b>ST2</b> 2' Stem <sup>12</sup> <b>ST4</b> 4' Stem <sup>12</sup> <b>STx</b> Specify <i>x</i> ' in Feet (Max 8') <sup>12</sup>
<b>PENDANT CEILING TYPE</b>	<b>Blank</b> Not Required	<b>T9</b> 9/16" T-bar Grid <b>T15</b> 15/16" T-bar Grid	<b>H</b> Hard / Dry Wall <b>SH</b> Sloped Hard / Dry Wall
<b>CORD / CANOPY FINISH</b>	<b>Blank</b> White Cord / White Canopy <b>WH/BK</b> White Cord / Black Canopy	<b>BK/BK</b> Black Cord / Black Canopy <b>BK/WH</b> Black Cord / White Canopy	<b>WH/RAL#</b> White Cord / Specify RAL # (Page 3) <b>BK/RAL#</b> Black Cord / Specify RAL # (Page 3)
<b>CRI</b>	<b>Blank</b> 80+ <sup>Standard</sup>	<b>9</b> 90+ <sup>9</sup>	
<b>LENS</b>	<b>Blank</b> Flat <sup>Standard</sup>	<b>DL</b> 1/2" Drop Down	
<b>OPTIONS</b>	<b>EM8</b> 8W Emergency Battery <b>EM15</b> 15W Emergency Battery <b>EM20</b> 20W Emergency Battery	<b>EM25</b> 25W Emergency Battery <b>OS</b> Occupancy & Daylight Harvesting Sensor <sup>20</sup> <b>DS</b> Daylight Dimming Photo Sensor <sup>20</sup>	<b>AB</b> Separate Uplight & Downlight Dimming Control <sup>10</sup> <b>GTD</b> Bodine Generator Transfer Device <b>COC</b> Chicago Code Compliance Separated EM Feed
<b>QUALIFICATIONS</b>	<b>Blank</b> Assembled in USA (ARRA) <sup>Standard</sup>	<b>BAA</b> Made in USA (Buy American Act)	
<b>WARRANTY</b>	<b>Blank</b> 5 Year Warranty <sup>Standard</sup>	<b>W7</b> 7 Year Warranty	<b>W10</b> 10 Year Warranty
<b>CONTROLS</b>	<b>STATIC WHITE</b> <b>Blank</b> Not Required	<b>TUNABLE WHITE<sup>4</sup></b> <b>TW-WWR-BK</b> Wireless Black Wall Remote <b>TW-WWR-WH</b> Wireless White Wall Remote <b>TW-DWR-BK</b> Wireless Black Desktop Remote  <b>TW-2N1-WH</b> Wired White Wall Switch	<b>RGBW<sup>13</sup></b> <b>RGBW-APP</b> iOS/Android Bluetooth App <b>RGBW-MZ</b> Wireless RF Remote Control Multi Zone <b>RGBW-DMXAC</b> 4-Channel DMX512 Decoder (100-240VAC) <b>RGBW-DMX5V</b> 4-Channel DMX512 Decoder (5VDC adapter)

1 Only available for Pendant and Wall Mounts with General Downlight Optics  
2 RGBW downlight can be paired with a static color temperature uplight or RGBW uplight  
3 Only compatible with D6 & D12 Downlight Wattages  
4 Wireless control must be specified (page 5)  
5 Minimum Length of 2 Feet

6 Draw your custom shape and send us your idea to rfq@alconlighting.com  
7 Must be Paired with 050 Driver  
8 Must specify for RGBW & Wireless Tunable White 24V Driver  
9 Not available for RGBW  
10 For RGBW, AB is only available though RGBW-MZ control or RGBW-APP  
11 Control system must be specified for this feature  
12 Stem finish will be the same as fixture finish

13 Bluetooth app control or wireless control must be specified for this feature (cannot be combined)  
14 Only for Wired Tunable White Control  
15 Only for Wireless Tunable White Control  
16 Not available for RT, RS, and RTL mountings.  
17 Max lumen for 6' & 8' lengths is 1467 lms.  
18 Only available in 90CRI  
19 Not available for RGBW  
20 Not available for wall mount  
21 Not available for recessed mount

## Available Finishes

### Standard

	Matte White	RAL #9003
--	-------------	-----------

Set up fee and longer lead time will be applied on non-standard finishes.

### Metropolitan

	Black	RAL #9011
--	-------	-----------

	Silver	RAL #9022
--	--------	-----------

	Asher Grey	RAL #7004
--	------------	-----------

	Mason	RAL #7039
--	-------	-----------

	Slate	RAL #7031
--	-------	-----------

	Tech Grey	RAL #7016
---	-----------	-----------

	Chocolate Spice	RAL #8017
--	-----------------	-----------

	Urban Native	RAL #8025
--	--------------	-----------

	Carmin	RAL #8028
--	--------	-----------

	Reseda Green	RAL #6011
--	--------------	-----------

### Vibrant

	Violet Dreams	RAL #4006
--	---------------	-----------

	Purple Red	RAL #3004
--	------------	-----------

	Carmine Red	RAL #3002
--	-------------	-----------

	Rose	RAL #3017
--	------	-----------

	Pure Orange	RAL #2004
--	-------------	-----------



	Traffic Yellow	RAL #1023
---	----------------	-----------

	Daisy	RAL #1018
--	-------	-----------


	Antique Spring	RAL #6019
--	----------------	-----------

	Island Skye	RAL #6027
--	-------------	-----------


	Sky Blue	RAL #5015
--	----------	-----------

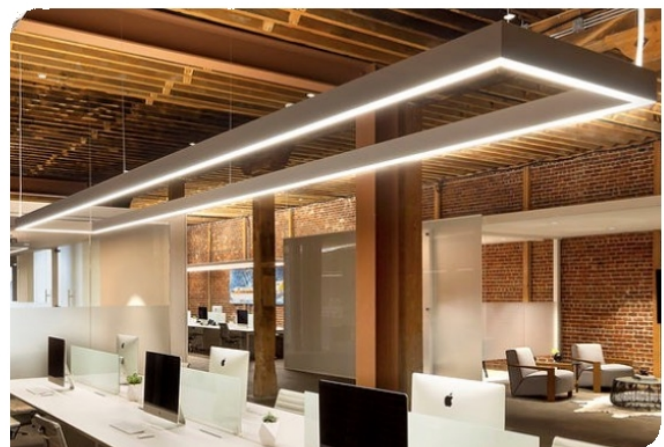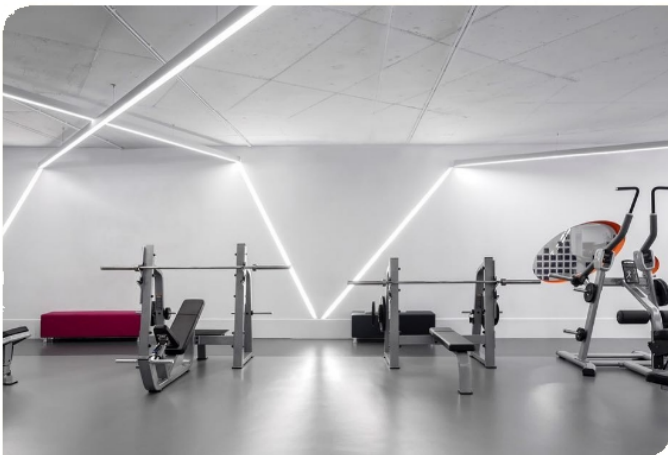


## Mounting

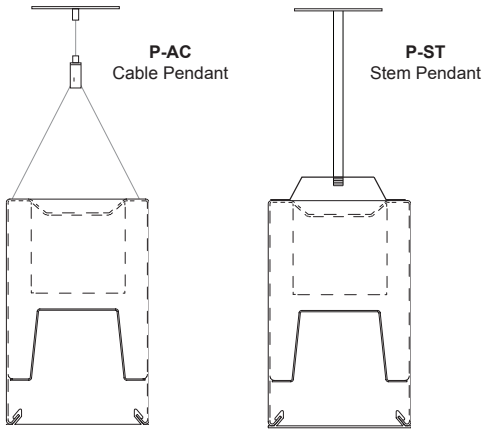


**RT - T-Bar Grid Mount**




**RS - Screw Slot Mount**




**RF - Flange Detail**




**RTL - Trimeless Detail**










**W - Wall**

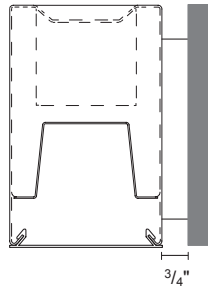


**S - Surface**



**CW - Ceiling to Wall**

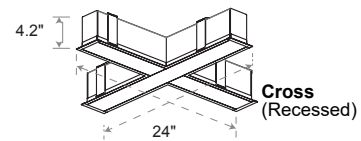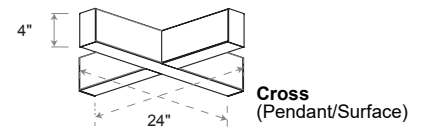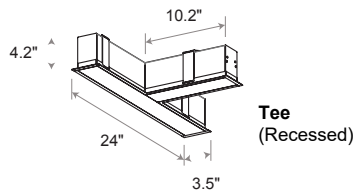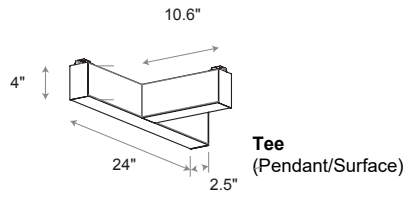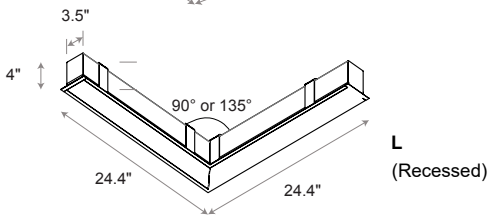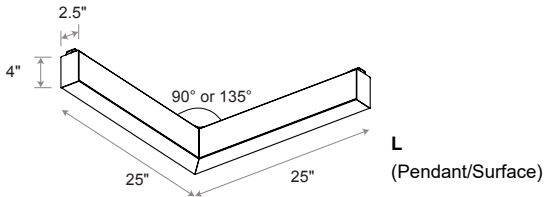

### Knockout Locations (4Ft Body)

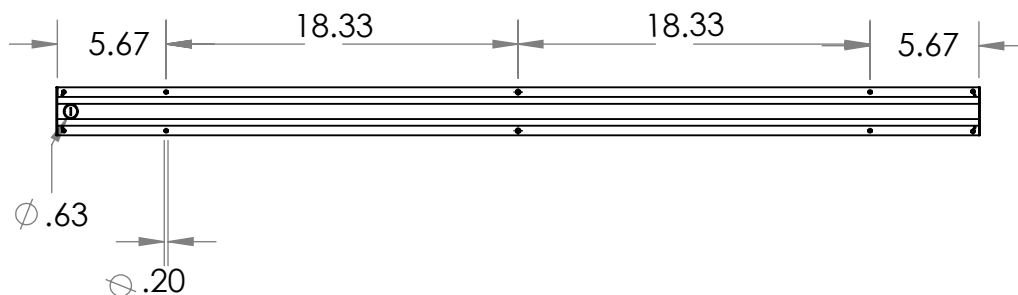



## Compatible Dimmers

### Static White



Triac	ELV	0-10V
TG-600P	DVELV-303P	NTSTV
LG-600P	SELV-300P	NFTV
TGCL-153P	MAELV-600	DVSTV
DV-600P	FAELV-500	
DVCL-153P		
S-603PG		
CT-103P		
S-600P		




6161	IPE04	IP710-DLZ
6633-P	VPE06-1LZ	
6683		
6631-2		
IPI06-1LZ		

## Wireless Tunable White Control

### TUNABLE WHITE

#### TW-2N1-WH Dual Wall Switch

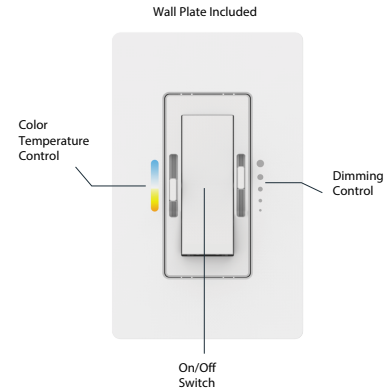

Input: 120VAC ~ 60Hz  
 Max Load: 600W  
 Control: 0-10V  
 Wired Tunable White: TW2750 & TW2065

Weight	0.35 lbs
Dimming Type	PWM
Signal Type	RF (Radio Frequency) 434 MHz/868MHz
Range	100ft from fixture
Maximum Load	24V @ DC 480W
Working Temperature	-20°F to 140°F (-28C to 60°C)
Battery	3V (CR2032 Battery)

### Wall

L - 4 3/8" x W - 3 1/4" x D - 1 3/4"



### Desktop

L - 4 3/8" x W - 3 1/4" x D - 2 1/2"



## RGBW-APP | Bluetooth Smart Phone App



Smart Life



Tuya Smart

Bluetooth	
Software	IOS 8.0 and up, Android 4.4 and up
App	Smart Life or Tuya Smart supported
Features	Group, Scenes
Bluetooth Distance	> 49ft in open area
Additional Feature	Home Management / Third party control -> Alexa, Google Assistant (by others)

## RGBW-RF | Wireless RF Remote Control 4-Zone



### WL-MZ (RF remote control)

Dimensions	W 2" x D 0.825" x H 4.725"
Weight	0.1lbs
Signal Type	RF (Radio Frequency) 2.4GHz
Range	98ft from fixture open air
Zone / Mode	4 zones / 9 modes
Working Temp.	-4°F to 131°F (-20°C to 55°C)
* Battery	2 x AAA battery

\* Not included

## RGBW-DMX | 4-Zone DMX512 Touch Panel



### RGBW-DMXAC


Zone	4 zone
Signal	DMX512 protocol
Input Voltage	100-240VAC
Dimensions	L 3.4" x H 3.4" x D 1.45"
Features	10 built-in mode, scene
Operating Temp.	-22°F ~ 131°F (-30°C ~ 55°C)



### RGBW-DMX5V


Zone	4 zone
Signal	DMX512 protocol
Dimensions	L 7" x H 1.3" x D 1.9"
Features	12 built-in mode, scene
Operating Temp.	-22°F ~ 131°F (-30°C ~ 55°C)

## RGBW-DMX | 4-Channel DMX512 Decoder

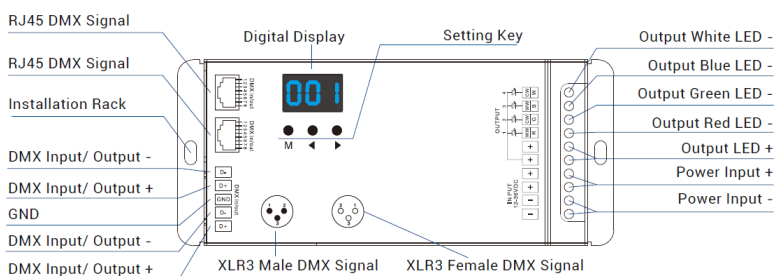

Dimensions	L 6.5" x W 2.7" x D 1.5"
Output Current	8A / 4 channels
Input Voltage	12-36V DC
Output Power	768W (24V)
Frequency	PWM output

## Lutron Vive Control (Optional)

Smart Sensors	Protocol	Compatible Networks	Occupancy	Daylight	Temperature Reporting	Communication to Luminaire
	Lutron Clear Connect	Lutron Vive System Network	Enabled	Enabled	No	Wireless



Controls Installed on the Fixture



**VDO**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled with VDO Vive Integral Fixture Control (with Sensing).



**VRF**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled with VRF Vive Integral Fixture Control (RF Only) Install on the Fixture.




**FCJ50**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled FCJ50 Control Module Installed on the Fixture.



**FCJ5E**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled FCJ5E Control Module Control Module Installed on the Fixture.




**FCJ50EM**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled FCJ50 Control Module Installed on the Fixture.



**FCJ5EEM**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled FCJ5EEM Control Module Control Module Installed on the Fixture.



**RMJS8TEM**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled RMJS8TEM Control Module Control Module Installed on the Fixture.



**RMJS8T**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled RMJS8T Control Module Installed on the Fixture.



**RMJSECO32**  
Individual  
Fixture Control

Shipped LUTRON VIVE Enabled RMJSECO32 Control Module Control Module Installed on the Fixture.

## Photometric (for Static Color Temperatures)

### Direct

**12100-20-D4-S-4**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	555 FC	3.9 FT	3.1 FT
3.3FT	147 FC	7.6 FT	6.1 FT
5.0FT	64.1 FC	11.6 FT	9.2 FT
6.7FT	35.7 FC	15.5 FT	12.3 FT
8.3FT	23.3 FC	19.2 FT	15.2 FT
10.0FT	16.0 FC	23.2 FT	18.4 FT

■ Vert. Spread: 98.4°  
■ Horiz. Spread: 85.1°

**12100-20-D13-S-4**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	993 FC	3.9 FT	3.1 FT
3.3FT	263 FC	7.6 FT	6.1 FT
5.0FT	115 FC	11.6 FT	9.2 FT
6.7FT	63.9 FC	15.5 FT	12.3 FT
8.3FT	41.6 FC	19.2 FT	15.2 FT
10.0FT	28.7 FC	23.2 FT	18.4 FT

■ Vert. Spread: 98.4°  
■ Horiz. Spread: 85.1°

**12100-20-D6-S-8**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	1,117 FC	3.9 FT	3.1 FT
3.3FT	296 FC	7.6 FT	6.1 FT
5.0FT	129 FC	11.6 FT	9.2 FT
6.7FT	71.9 FC	15.5 FT	12.3 FT
8.3FT	46.8 FC	19.2 FT	15.2 FT
10.0FT	32.3 FC	23.2 FT	18.4 FT

■ Vert. Spread: 98.4°  
■ Horiz. Spread: 85.1°

**12100-20-D13-S-8**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	1,986 FC	3.9 FT	3.1 FT
3.3FT	527 FC	7.6 FT	6.1 FT
5.0FT	230 FC	11.6 FT	9.2 FT
6.7FT	128 FC	15.5 FT	12.3 FT
8.3FT	83.3 FC	19.2 FT	15.2 FT
10.0FT	54.7 FC	23.2 FT	18.4 FT

■ Vert. Spread: 98.4°  
■ Horiz. Spread: 85.1°

### Direct/Indirect

**12100-20-D6-I6-S-4**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	470 FC	3.9 FT	3.3 FT
3.3FT	296 FC	7.6 FT	6.5 FT
5.0FT	129 FC	11.5 FT	9.8 FT
6.7FT	71.9 FC	15.5 FT	13.2 FT
8.3FT	46.8 FC	19.1 FT	16.3 FT
10.0FT	32.3 FC	23.1 FT	19.7 FT

■ Vert. Spread: 98.1°  
■ Horiz. Spread: 89.0°

**12100-20-D13-I4-S-4**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	982 FC	3.8 FT	3.1 FT
3.3FT	261 FC	7.4 FT	5.9 FT
5.0FT	114 FC	11.3 FT	9.0 FT
6.7FT	63.2 FC	15.1 FT	12.1 FT
8.3FT	41.2 FC	18.7 FT	14.9 FT
10.0FT	28.4 FC	22.6 FT	18.0 FT

■ Vert. Spread: 96.9°  
■ Horiz. Spread: 83.9°

**12100-20-D9-I6-S-8**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	940 FC	3.9 FT	3.3 FT
3.3FT	249 FC	7.6 FT	6.5 FT
5.0FT	109 FC	11.5 FT	9.8 FT
6.7FT	60.5 FC	15.5 FT	13.2 FT
8.3FT	39.4 FC	19.1 FT	16.3 FT
10.0FT	27.2 FC	23.1 FT	19.7 FT

■ Vert. Spread: 98.1°  
■ Horiz. Spread: 89.0°

**12100-20-D6-I4-S-8**  
Illuminance at a Distance

	Center Beam FC	Beam Width	
1.7FT	1,965 FC	3.8 FT	3.1 FT
3.3FT	521 FC	7.4 FT	5.9 FT
5.0FT	227 FC	11.3 FT	9.0 FT
6.7FT	126 FC	15.1 FT	12.1 FT
8.3FT	82.4 FC	18.7 FT	14.9 FT
10.0FT	56.8 FC	22.6 FT	18.0 FT

■ Vert. Spread: 96.9°  
■ Horiz. Spread: 83.9°



# COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
<b>WARM WHITE</b>	<b>SOFT WHITE GLOW</b>	<b>NEUTRAL GLOW</b>	<b>COOL WHITE GLOW</b>	<b>DAYLIGHT GLOW</b>
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS

Alcon Lighting 12100-20 hitectural LED Linear Direct/Indirect Light

