

INTENDED USE

Offering field-adjustable color temperature switching, our direct/indirect ultra-thin pendant features a unique design that provides both energy efficiency and style. While a center semitransparent diffuser contributes to uplight distribution, a frosted or louvered lensed bottom provides downlight.

DETAILS

Construction: Extruded aluminum housing.

Mounting: Pendant mounting with 4FT adjustable aircraft cable

Finish: Silver

Wattage: 40W

Lumen: 4000 Lumen

Delivered Lumen: 4207 Lumen

Color Temperature: Color temperature switch is capable of switching from 3000K/3500K/4000K

Voltage: 120V-277V, 50/60Hz


Dimming: 0-10V Dimmable

CRI: 90+

Life: 50,000 Hours

Warranty: 5 years Carefree for parts & components (Labor not included)


Listings: UL, Damp Location Rated.

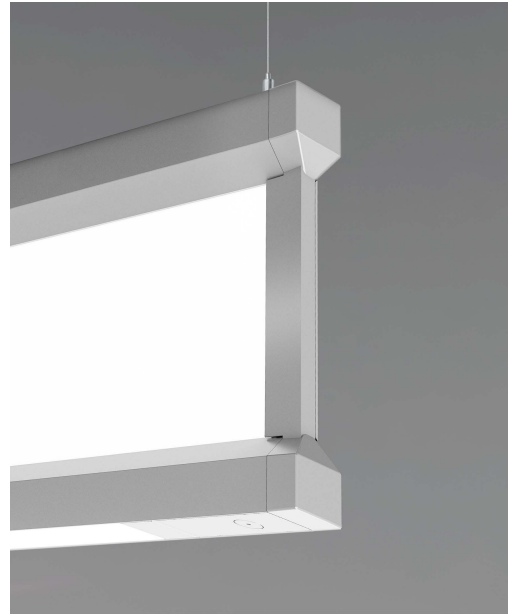

Frosted Lens



Louvered Lens

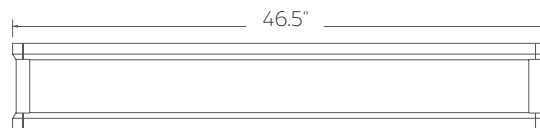

Alcon Lighting 12138 Slim LED Direct and Indirect Linear Light





ORDERING INFORMATION Example: (12138-F-T15)

Model	Length	Lens	Pendant Ceiling Type
12138	4 4 Foot	F Frosted	T9 9/16" Grid
8 ¹	8 Foot	L Louvered	T1 ar 15/16"
12 ²	12 Foot		H Grid T-bar
CRx ³	Continuous Run x = Length in feet		Hard / Dry Wall

¹ 8 Ft. fixture is a continuous row made of two, 4 Ft. fixtures
² 12 Ft. fixture is a continuous row made of three, 4 Ft. fixtures
³ Field installed for continuous row applications in 4 Ft. increments.
 Continuous run can max be connected up to 40ft in run or 10 fixtures total.



Alcon Lighting 12138 Slim LED Direct and Indirect Linear Light

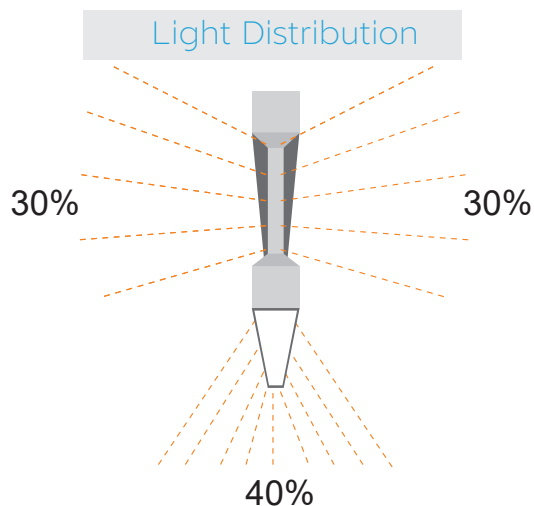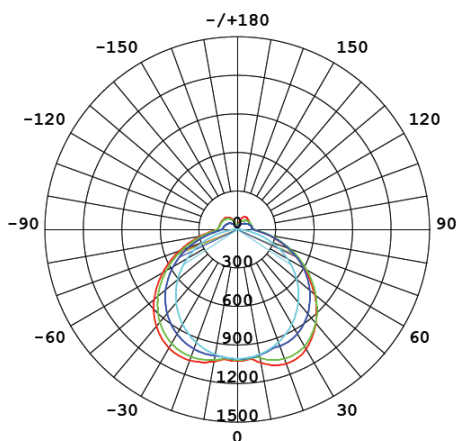

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X