

Project Name: \_\_\_\_\_

Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

[Shop Now](#)


## FIXTURE SPECIFICATIONS

### INTENDED USE


Our pendant LED light is designed for commercial and residential lighting interiors. This commercial-grade product provides up to 3500 lumens of downlight and 1500 lumens of uplight. The fixture also offers individual color temperature switching from 3000K, 3500K & 4000K both up and downlight. This 120V-277V product is ideal for office lighting and conference rooms.

### FEATURES


- Light Direction Switch:** Light Direction is selectable from Down only, Up only or both Down & Up lights.
- Color Temperature Switch:** Control the temperatures of down or uplight individually. Switch from 3000K, 3500K & 4000K.
- Construction:** Die-formed and welded 22-gauge cold rolled steel, painted finish with premium paint
- Lens:** Glare-free frosted acrylic flat lens for even distribution
- Pendant Mounting:** Includes 10 Foot Aircraft Cable
- Indirect Pendant Mounting:** For most effective indirect lighting result, mount at or less than 18" from the ceiling
- Operating Temperature:** 4°F (-20°C) ~ 122°F (50°C).
- Voltage:** 120-277V, 50/60 Hz
- Wattage:** 35W Downlight | 15W Uplight
- Lumens:** 3500lms Downlight | 1500lms Uplight Per 4 Foot
- CRI:** 80+
- Dimming:** 0-10V Dimming.  
See compatible dimmer list on pg. 3
- Warranty:** Standard 5 Years Carefree for Parts & Components (Labor Not Included)
- Listing:** cETLus, Designed in the USA



### LIGHT DIRECTION

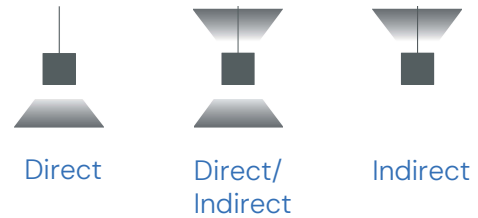

### Color Temperature & Light Distribution Field Adjustable Controls

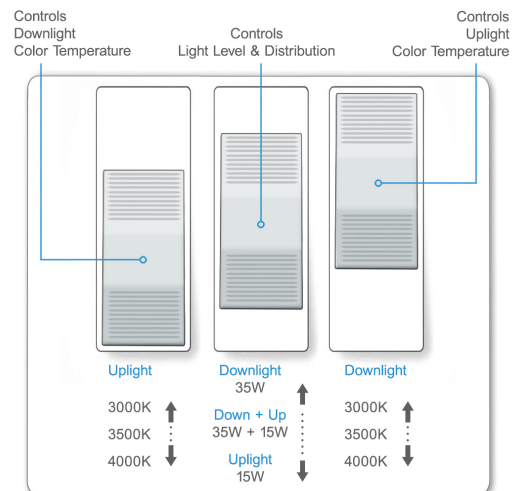

Alcon Lighting 12180 LED Linear Pendant Color Temperature and Light Selectable



## ORDERING INFORMATION Example: (12180-4-WH)

Model	Length	Finish	Options
12180	4	4 Foot	<b>WH</b> Glossy White <b>EM8</b> 8W Emergency Back-up Battery <b>BK</b> Matte Black <b>EM15</b> 15W Emergency Back-up Battery <b>SL</b> Matte Grey <b>EM20</b> 20W Emergency Back-up Battery
	8	8 Foot	
	CRx <sup>1</sup>	Continuous Row	

<sup>1</sup> Can only be created with 4ft and 8ft lengths. Maximum run at 120V is either seven 4-foot or four 8-foot Maximum run at 277V is either fourteen 4-foot or nine 8-foot

## AVAILABLE FINISHES

	Glossy White	RAL #9010
	Matte Black	RAL #9005
	Matte Grey	RAL #7035



Alcon Lighting 12180 LED Linear Pendant Color Temperature and Light Selectable

## COMPATIBLE DIMMERS



NTSTV  
NFTV  
DVSTV



IP710-DLZ

## COLOR TEMPERATURE GUIDE



Alcon Lighting 12180 LED Linear Pendant Color Temperature and Light Selectable