

Project Name: _____

Type: _____ Quantity: _____

[Shop Now](#)

FIXTURE SPECIFICATIONS

With the capacity to switch wattage and color temperature, a frosted, impact-resistant flat lens and 100,000 hours of life, the LED light offers abundant light in a slender, versatile and modern design that's ideal for today's interior spaces. Our product is made for recessed, suspended and surface-mounted applications. Perfect for the office, conference room, corridor, lab or public space.

DIMENSIONS

Height: 1.625"
(41mm)

FEATURES

Color Temperature: Features the ability to switch color temps from 3500K, 4000K and 5000K.

Construction: Aluminum housing

Lens: Satin White

Finish: White

Voltage: 100-277V 50/60 Hz constant current

Life: L70 - 50,000 Hrs

Lens: Frosted white impact-resistant lens

Dimming: 0-10V dimming to 10%

Life: 100,000 hours


CRI: 80+

Operating Temperature: -4°F ~ 113°F (-20°C ~ 45°C)

Listing: cULus, DLC, Assembled in the USA (optional), UL 1598 suitable for damp locations, type IC, UL 8750 LED equipment in Lighting Products

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Wattage and color temperature switches are accessible on the driver box

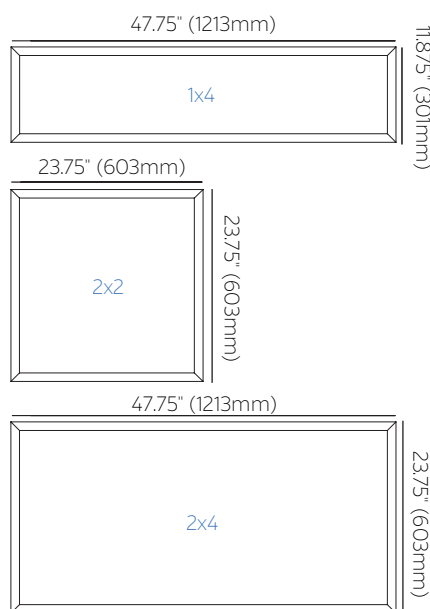

Alcon Lighting **14075** Recessed Flat Panel Architectural Troffer LED Light

ORDERING INFORMATION Example: [14075-14-EM10](#)

Model	Size Wattage Lumens	Options
14075	14	EM8
	1x4 25W, 30W, 40W 4400lm, 4440lm, 4480lm	8W Emergency Battery
	22	EM16
	2x2 25W, 30W, 40W 4400lm, 4440lm, 4480lm	16W Emergency Battery
	24	EM25
	2x4 30W, 40W, 50W 5500lm, 5550lm, 5600lm	25W Emergency Battery
		P1 Prismatic Lens

¹Replaces standard Satin White Lens

COMPATIBLE DIMMERS

	ALCON LIGHTING	LUTRON	LEVITON®
0-10 V	2100 2101 2102	Diva DVTV	IP-710-DL

COLOR TEMPERATURE GUIDE

