


FIXTURE SPECIFICATIONS

INTENDED USE

The Specification Grade Alcon Lighting 15223 Architectural LED Linear High Bay Direct Down Light provides energy efficient high bay lighting with excellent protection against light beam intensity and heat conduction. The luminaire is made with stability, high performance and long life. Perfect for gymnasiums, warehouses, industrial facilities and other commercial high bay applications, the Helmut's unique lightweight aluminum alloy design with loop heat pipe allows for excellent heat dissipation.

FEATURES

- Construction: Cold rolled Steel
- Operating Temperature: -4°F ~ 113°F (-20°C ~ 45°C)
- Temperature: 40/50K Selectable switch
- Beam Angle: 102°
- Wattage: LO/MD/Hi Selectable switch
- Voltage: 120-277V 50/60Hz
- CRI: 80
- Power Factor: > 0.95
- Dimming: 0-10V Dimmable
- Life: 75,000 Hour
- Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings: cULus, FCC, DLC Premium

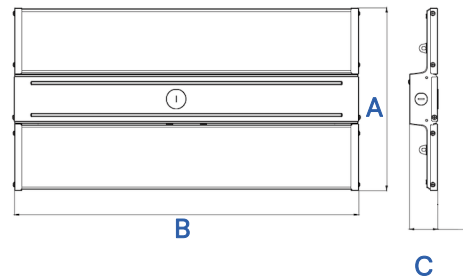

1.4FT: A: 10.2" B: 16.6" C: 1.8"
 1.9FT: A: 10.2" B: 22.9" C: 1.8"
 2.6FT: A: 10.2" B: 31.2" C: 1.8"
 3.7FT: A: 10.2" B: 44.2" C: 1.8"

SIZE	1.4FT	1.9FT	2.6FT	3.7FT
WATTS	100W/115W/135W	155W/185W/200W	200W/230W/270W	270W/340W/400W
LUMEN	15923 lm/17709lm/19917lm	23444 lm/26623lm/28094lm	31180 lm/34782lm/39773lm	41668 lm/50558lm/56154lm



ORDERING INFORMATION Example: (15130-14-AL16)

Model	Length		Options	
15223	14	1.4 Feet	MSDL	Motion and Daylight Sensor
	19	1.9 Feet		
	26	2.6 Feet	S	Surface Mount Kit
	37	3.7 Feet		

Alcon Lighting 15223 Architectural LED Linear High Bay Direct Down Light