

FEATURES & SPECIFICATIONS

INTENDED USE

The Alcon Lighting **Elite** Architectural LED Center Basket Troffer is designed to reflect light from its matte surface to provide a glare-free, softened "sky light" appearance where abundant and comfortable lighting is needed. The Elite series is configured for recessed applications in commercial and industrial buildings and is ideal for schools and offices.

DETAILS

W 23.75" x **L** 47.75" x **D** 5.5"

Construction: Die-formed, cold-rolled heavy gauge steel housing

Corrosion Resistant

Diffuser: Perforated metal diffuser with white acrylic overlay

Mounting: Recessed mount in expose T-Bar ceilings

ADDITIONAL FEATURES

Voltage: 120-277

CRI: 80+

Dimming: 0-10V

Life: L70 - 50,000 Hours

Operating Temperature: -4°F ~ 122°F



Power Factor: +0.95

Efficiency: +85%

THD: <20

Listing: Suitable for damp locations

ARRA Compliant

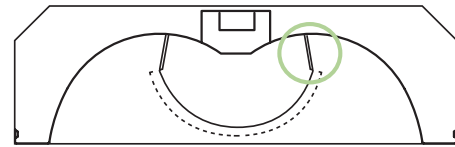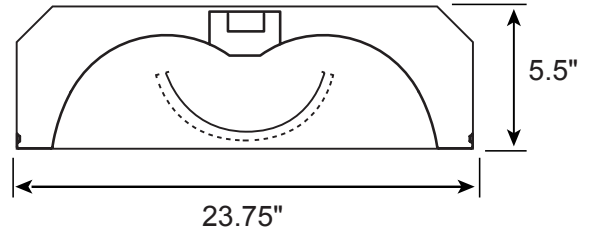

DPL lens option

Ordering Information:

Example: (14002-54W-35K)

Model	Wattage Lumens	Color Temp	Options
14002	44W 44 watts, 2235 lms 54W 54 watts, 3161 lms 68W 68 watts, 3454 lms	30K 3000K 35K 3500K 40K 4000K 50K 5000K	OS Occupancy Sensor DPL Dust/Bug Proof Clear Acrylic Lens EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast