

FEATURES & SPECIFICATIONS

INTENDED USE

The Alcon Lighting **Prime** Architectural LED Low Profile Center Basket Troffer is designed to discreetly provide smooth, softened, uniform ambient lighting from a center diffuser and is ideal for shallow spaces. The Prime Series is configured for recessed applications in modern commercial, industrial, and institutional spaces.

DETAILS

2x2: W 24" x L 24" x D 3.25"

2x4: W 48" x L 24" x D 3.25"

Construction: Die formed, embossed code 22 gauge steel housing

Finish: High reflectance baked white enamel

Reflectors: Matte white

Diffuser: Linear ribbed acrylic lens or perforated metal diffuser

Snaps into place; no tools required for removal

Mounting: Grid mount recessed inverted T-Bar ceilings

ADDITIONAL FEATURES


Voltage: 120-277

Dimming: 0-10V




CRI: 80+ (Standard)



2x2

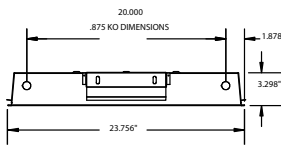

2x4

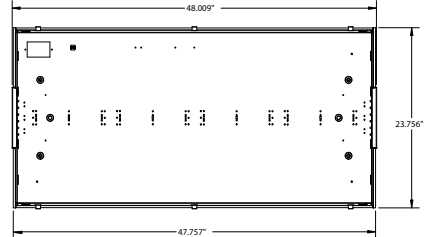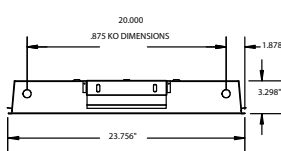

Ordering Information:

Example: (14011-22-R26L-30K-CRI9)

Model	Size	Lens Wattage Lumens		Color Temp	Options	
14011	22	2'x2'	With Ribbed Lens		30K 3000K 35K 3500K 40K 4000K 50K 5000K	CRI9 90 CRI+ SM Surface Mount Kit FK Flange Kit EM Emergency Ballast CP Chicago Plenum Compliant
			With Perforated Metal Diffuser			
		R19L 15 Watts, 1950 Lumens		P19L 15 Watts, 1170 Lumens		
		R26L 20 Watts, 2600 Lumens		P26L 20 Watts, 1560 Lumens		
		R32L 25 Watts, 3250 Lumens		P32L 25 Watts, 1950 Lumens		
		R42L 33 Watts, 4290 Lumens		P42L 33 Watts, 2574 Lumens		
	24	2'x4'	With Ribbed Lens		With Perforated Metal Diffuser	
			R28L 20 Watts, 2880 Lumens		P28L 20 Watts, 1728 Lumens	
			R36L 25 Watts, 3600 Lumens		P36L 25 Watts, 2160 Lumens	
			R43L 30 Watts, 4320 Lumens		P43L 30 Watts, 2592 Lumens	
			R50L 35 Watts, 5040 Lumens		P50L 35 Watts, 3024 Lumens	
			R57L 40 Watts, 5760 Lumens		P57L 40 Watts, 3456 Lumens	
			R64L 45 Watts, 6480 Lumens		P64L 45 Watts, 3888 Lumens	
			R72L 50 Watts, 7200 Lumens		P72L 50 Watts, 4320 Lumens	
R77L 54 Watts, 7780 Lumens		P77L 54 Watts, 4668 Lumens				