

FEATURES & SPECIFICATIONS

INTENDED USE

The Alcon Lighting **Elite** Architectural LED Center Basket Troffer is designed to reflect light from its matte surface to provide a glare-free, softened "sky light" appearance where abundant and comfortable lighting is needed. The Elite series is configured for recessed applications in commercial and industrial buildings and is ideal for schools and offices.

DETAILS

W 23.75" x **L** 47.75" x **D** 5.5"

Construction: Die-formed, cold-rolled heavy gauge steel housing

Corrosion Resistant

Mounting: Recessed mount in expose T-Bar ceilings

ADDITIONAL FEATURES

Voltage: 120-277

Wattage: 54W

CRI: 83+

Dimming: 0-10V 1%~100%

Life: L70 - 50,000 Hours

Operating Temperature: -4°F ~ 122°F


Power Factor: +0.95

Efficiency: +85%

THD: <20

Listing: Suitable for damp locations

IC Rated

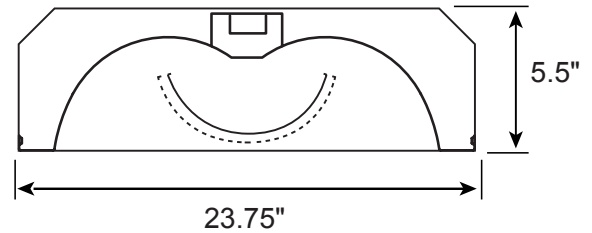

Ordering Information:

Example: (24002-PD-40K)

Model	Lens/Lumens	Color Temp
<input type="text" value="24002"/>	<input type="text" value="PD"/>	<input type="text" value="30K"/>
24002	PD Perforated Metal Diffuser / 3161 lms	30K 3000K
	RA Ribbed Acrylic Diffuser / 4893 lms	35K 3500K
		40K 4000K
		50K 5000K