


Project Name:

Type:

Quantity:

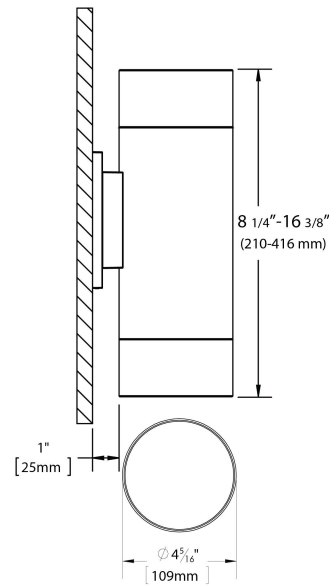

## FIXTURE SPECIFICATIONS

### INTENDED USE

The Cilindro Architectural LED Cylinder Light Fixture is a versatile and high performance fixture offering both precision lighting and elegant style and can be used for any new construction, remodel, or retrofit projects. The Cilindro is ideal for architectural, commercial, and residential applications in columns, surfaces, or pathways.

### AVAILABLE DIMENSIONS

**Medium** | H 8" x Dia 4.3"

**Large** | H 12" x Dia 4.3"

### FEATURES

**Construction:** Die-cast extruded aluminum body

**Junction Box:** Installs in most 3"/4" octagonal and 3"/4" round boxes

**Voltage:** 120-277V 50/60 Hz

**CRI:** 90+, 2-step SDCM

**Life:** 50,000 hours

**Operating Temperature:** 40°

**Power Factor:** >.9

**Emergency:** Mounted remote inverter (90 minutes)

**Warranty:** 5 years carefree for parts & components (labor not included)

**Listings:** cULus listed, Energy star qualified, Title 24 JA8 compliant, Damp location rated is standard, IP54 rated for wet locations is optional



## ORDERING INFORMATION Example: (11237-750L/750L-30K-BR-B25-B40-ELV-EM)

Model	Wattage & Lumens	Color Temp	Finish	Optics Down	Optics Up	Dimming	Options
<b>11237</b> Medium (Direct Only)	<b>11W</b> 10.8 W   750 lms	<b>27K</b> 2700K	<b>WH</b> <i>Standard</i> White	<b>B15</b> 15° Narrow Spot	<b>B00</b> None	<b>ELV</b> TRIAC/ELV Electronic Low Voltage (120V) 3-wire 100%-5%	<b>EM</b> Emergency Remote Inverter
<b>11238</b> Large (Direct Only)	<b>13W</b> 12.8 W   1000 lms	<b>30K</b> 3000K	<b>BK</b> Black	<b>B25</b> 25° Spot	<b>B15</b> 15° Narrow Spot		<b>DFT</b> Decorative Frost Trim
<b>11239</b> Large (Direct/Indirect)	<b>20W<sup>1</sup></b> 20 W   1500 lms	<b>35K</b> 3500K	<b>BR</b> Bronze	<b>B40</b> 40° Flood	<b>B25</b> 25° Spot	<b>O10<sup>1</sup></b> 0-10V (120V) 5-wire 100%-5%	<b>WL</b> Wet Location
	<b>28W<sup>1</sup></b> 28 W   2000 lms	<b>40K</b> 4000K	<b>BA</b> Brushed Aluminum	<b>B60</b> 60° Wide Flood	<b>B40</b> 40° Flood		
	<b>11W/11W</b> 21.6 W   750/750 lms (Direct/Indirect)		<b>RAL</b> Custom Color	<b>B90<sup>2</sup></b> 90° Ambient	<b>B60</b> 60° Wide Flood		
	<b>11W/13W<sup>1</sup></b> 23.6 W   750/1000 lms (Direct/Indirect)				<b>B90</b> 90° Ambient		
	<b>1000L/1000L<sup>1</sup></b> 25.6 W   1000/1000 lms (Direct/Indirect)						

<sup>1</sup>Not Available for Medium Models

<sup>2</sup>Only available in 750 lm, 1000 lm, or 1500 lm