

FEATURES & SPECIFICATIONS

INTENDED USE

The Alcon Lighting **Milano** Architectural LED Directional Up Light Fixture features naturally etched finishes capable of withstanding the test of time. The Milano Directional Uplights are ideal for architectural landscape lighting applications.

DETAILS

L 4.75" x **Dia** 2"

Construction: Corrosion Resistant Brass

Lens: Clear and heat resistant convex glass

Wiring: Prewired with a 3' 18-2 SPT2-W direct burial cord

Socket: Spring loaded top grade adjustable ceramic bi-pin

Gasket: Watertight Silicone Gasket

Knuckle: Adjustable cast brass with thumb screw and 1/2" NPT threaded male hub

Mounting: Standard injection molded spike with 1/2" NPT threaded female hub (1/2" NPT Spike included)

Electrical: Remote 12V transformer required (Not included)

Halogen Equivalent: MR16 - 20W (3.5W) / 50W (5W)

Finish: Bronze

ADDITIONAL FEATURES

Voltage: 12V AC/EDC


Color Temperature: 2700K

CRI: 80

Ambient Temperature: -22°F - 122°F

Life: 50,000 Hrs

Warranty: Limited Lifetime Warranty
5 Year Limited Warranty on LED

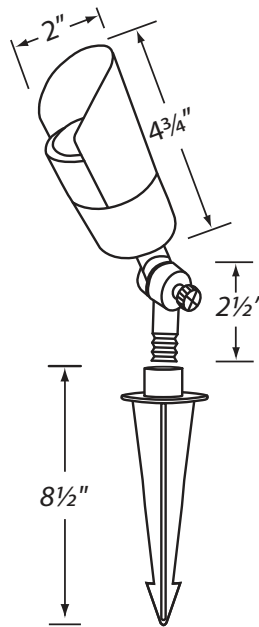

Mounting Accessories:



Mounting Stem



Mounting Canopy



Mounting Pedestal

Ordering Information:

Example: (9010-5S)

Model	Wattage/Lumens/Optics	Mounting	Options
9010	5S 5W / 450 lms / 15° Spot 5F 5W / 450 lms / 38° Flood 5WF 5W / 450 lms / 60° Wide Flood	(Blank) 1/2" NPT Spike Included MC Mounting Canopy MS6¹ 6" Mounting Stem MS12¹ 12" Mounting Stem MS18¹ 18" Mounting Stem MS24¹ 24" Mounting Stem MP² 18" Mounting Pedestal	UWC Universal Wire Connector

¹Bronze Finish
²Black Finish