

FEATURES & SPECIFICATIONS

INTENDED USE

The **Alcon Lighting Planor Series Recessed Mount Wall Wash Luminaire** offers a sharp and modern linear design perfect for today's interior spaces, suited for offices, conference rooms, corridors, schools, labs, and public spaces.

DETAILS

**4 FT - W 4" x L 48" x H 4"**

**Construction:** Die-formed and welded 22-gauge cold rolled steel

**Lens:** Matte White

ADDITIONAL FEATURES



**Type:** Direct Downlight

**Voltage:** 120-277

**Dimming:** 0-10V

**Life:** 50,000 Hours

**Listings:** ETL Listed for LED Component Only

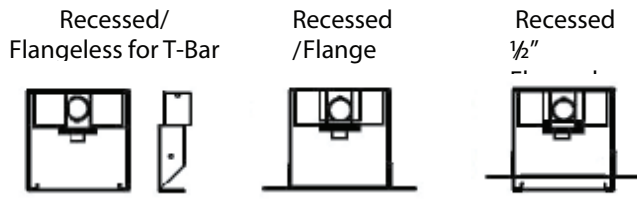

Ordering Information:

Example: (14008-4-RWW-R48-35K-DM10-WH-EM)

Model	Mounting	Wattage and Lumens	Color Temp	Dimming	Flange Finish
<b>14008-&amp;RWW</b> Recessed Wall Wash	<b>R</b> Trimless 1" T-Bar Grid Ceiling <sup>1</sup>	<b>R24</b> 24 watts, 2400 lumens	<b>27K</b> 2700K (90+ CRI)	<b>DM10</b> 0-10V Dimming 100%-10% (Title 24 Compliant)	(Required for RF only) <b>WH</b> White
	<b>RR1/2</b> Trimless 1/2" Drywall Hard Ceiling <sup>1</sup>	<b>R48</b> 48 watts, 4800 lumens	<b>30K</b> 3000K (83 CRI)	<b>DM1</b> 0-10V Dimming 100%-1% (Title 24 Compliant)	<b>BK</b> Black
	<b>RR5/8</b> Trimless 5/8" Drywall Hard Ceiling <sup>1</sup>		<b>35K</b> 3500K (83 CRI)		<b>SL</b> Silver
	<b>RRXX</b> Trimless Custom Drywall Hard Ceiling <sup>1</sup>		<b>40K</b> 4000K (83 CRI)		
	<b>RF</b> Flanged Drywall Hard Ceiling		<b>50K</b> 5000K (83 CRI)		

Options

- EM** Emergency Ballast
- CRWK** Continuous Row Wiring Kit
- DS** Daylight Sensor

<sup>1</sup>Trimless mounting options do not require finish