

FIXTURE SPECIFICATIONS

INTENDED USE

The **RTLED 2x2 Architectural Dual Basket Recessed Troffer** is a Specification Grade fixture featuring high reflectance diffuser panels to manage contrast and generate soft illumination. The RTLED is ideal for hospitals, hallways, conference rooms, office, schools, and other commercial applications.

DETAILS

W 23.69" x **L** 24" x **Dp** 3.5"

Construction: 22-gauge die formed C.R.S steel housing with high reflectance
Corrosion Resistant

Voltage, Surge, Short Circuit, and Overload Protected

Finish: Non-glare white powder coat finish

Lens: Ribbed white translucent acrylic

Reflector: Textured matte white

Mounting: Recessed in exposed T-Bar ceilings

ADDITIONAL FEATURES

Voltage: 120-277 UNV

Efficiency: 125 lms/w


Dimming: 0-10V 10-100%

Power Factor: >0.90

Operating Temperature: -31°F-122°F

Life: L70 - 60,000 Hours

Listing: Suitable for damp locations

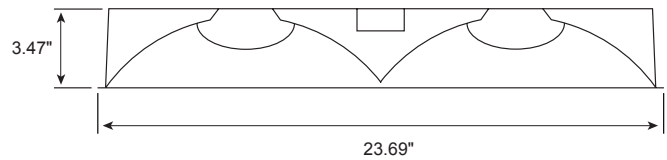

ORDERING INFORMATION Example: (14059-33W-35K-G)

Model	Wattage Lumens	Color Temperature	Trim Type	Options
14059	33W 33 Watts 4061 Lumens	35K 3500K	G Grid	EM-10 10W Emergency Ballast
	41W 41 Watts 5223 Lumens	40K 4000K	F Flange SM Surface Mount	EM-7 7W Emergency Ballast