


CONFIGURATIONS			
Length	Input Watts	Lumen Output	Lumen Efficiency
2	22W	2060	93.68 lm/W
	30W	2810	93.68 lm/W
4	40W	3747	93.68 lm/W
	60W	5620	93.68 lm/W
8	80W	7494	93.68 lm/W
	120W	11241	93.68 lm/W

SDM OPTION			
Length	Input Watts	Lumen Output	Lumen Efficiency
2	27W	2410	89.3 lm/W
4	42W	3749	89.3 lm/W
	56W	4999	89.3 lm/W
8	84W	7498	89.3 lm/W
	112W	9998	89.3 lm/W

: Based on 5000K.

Distribution Data (11113-4-56W)

Polar Candela Distribution

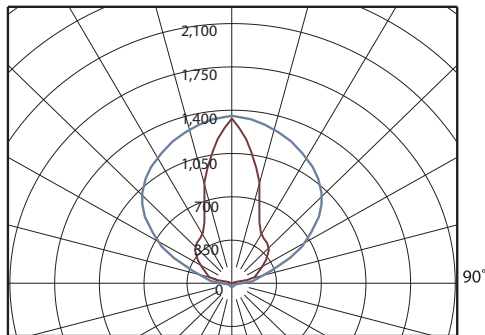

Illuminance at a Distance

