


LENSED LOWBAY

Suono 15203

DIMMING

Suono 15203



These LED luminaires that provide conventional footcandle levels at less than or equal to 1.4W/FT².

Featuring Nichia Corp. chips, available in three white color temperatures: **W30** (3000° K), **W35** (3500° K), and **W40** (4000° K); matching the traditional CCT of existing incandescent, fluorescent, and metal halide lamps.

cUL rated for dry locations only.

STANDARD

- Constant current, 0–10V universal voltage, 10%.


LUTRON DRIVER OPTION

D9A – Lutron Hi-Lume A-Series LED Driver (1%).

- EcoSystem (3-wire) control.
- 40–53W, universal voltage (120–277V).
- Constant current (1.05A) driver, with pulse width modulation (PWM) dimming.

CP DISTRIBUTION

LM - 79 TEST SUMMARY - 15203

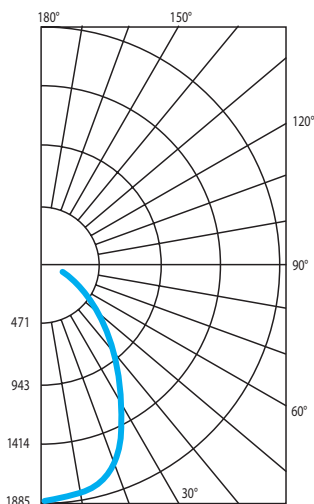

Driver:	Philips Advance
Total Lumens:	3558.08
Input Power (W):	57.30
Efficacy:	66.68
Color Rendering Index (CRI):	87

CAUTION

Aircraft cable suspension is not recommended for outdoor use, where fixture will be exposed to water, or subject to wind oscillation. Avoid use near HVAC vents and in environments with corrosive chemical vapors, such as swimming pools.

COEFFICIENTS

% CEILING 80	(20% FLOOR)		
% WALL	70	50	30
0	119	119	119
1	110	106	103
2	102	95	89
3	94	85	77
4	87	76	68
5	80	69	61
6	75	63	55
7	70	57	49
8	65	53	45
9	61	49	41
10	58	46	38

NOTES

Suono 15203

50W 3500° K LEDs
Total lumens: 3,558
Spacing criteria: 1.06

Watts	Lumens	mA
50	3,558	1,050
35	2,490	750
23	1,680	500