


CONFIGURATIONS			
Length	Input Watts	Lumen Output	Lumen Efficiency
2	22W	1964	89.3 lm/W
	30W	2678	89.3 lm/W
4	40W	3571	89.3 lm/W
	60W	5357	89.3 lm/W
8	80W	7143	89.3 lm/W
	120W	10714	89.3 lm/W

SDM OPTION			
Length	Input Watts	Lumen Output	Lumen Efficiency
2	27W	2410	89.3 lm/W
4	42W	3749	89.3 lm/W
	56W	4999	89.3 lm/W
8	84W	7498	89.3 lm/W
	112W	9998	89.3 lm/W


: Based on 5000K.

Distribution Data (11112-4-56W)

Polar Candela Distribution

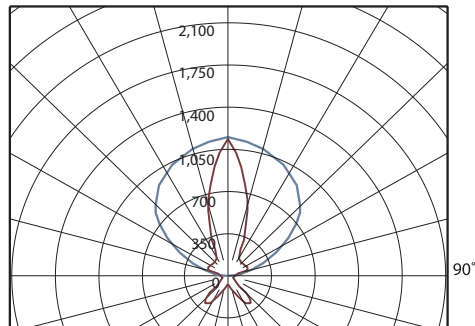

Illuminance at a Distance

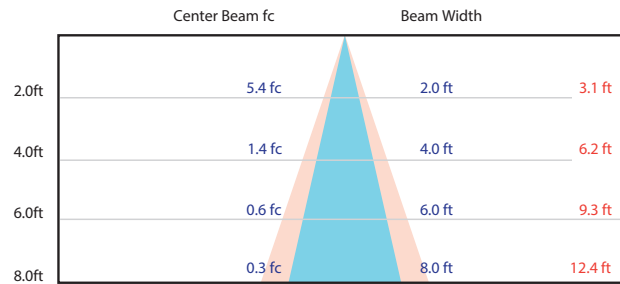

Vert. Spread: 52.9°
 Horiz. Spread: 75.6°