

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Alcon Lighting i253 Series Architectural LED Linear Recessed Direct Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

2FT | W 2.375" x L 24" x H 3.35"

4FT | W 2.375" x L 48" x H 3.35"

8FT | W 2.375" x L 96" x H 3.35"

Custom Length | Consult Factory

FEATURES

Construction: Die-formed and welded 22-gauge cold rolled steel



Lens: Snap In Frosted Acrylic

Dimming Driver: 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire

CRI: 83

Life: 50,000 Hours

Listings: cETLus Listed, Title 24 Listed

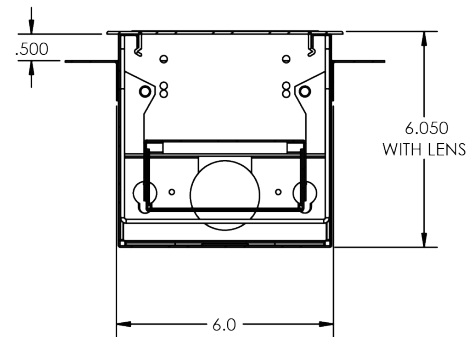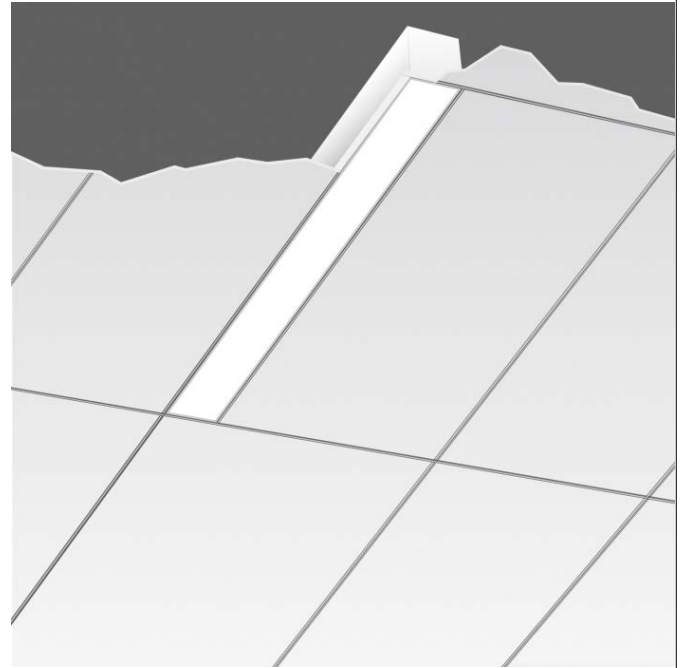

ORDERING INFORMATION Example: (14104-RR-2-35K-D10-WH-CRWK)

Model	Length Wattage Lumens	Color Temp	Dimming Driver	Flange Finish	Options
14104-RR ¹ Trimless Drywall Hard Ceiling	2 2 Foot 15 Watts 1700 Lumens	Commercial	D10 120-277V 5-Wire 0-10V (100% -10%)	WH White BK Black SL Silver	CRWK Continuous Row Wire Kit EM Emergency Backup Battery DS Integrated Daylight Sensor
	4 4 Foot 18 Watts 2100 Lumens	35K 3500K			
	8 8 Foot 36 Watts 4200 Lumens	40K 4000K			
14104-RF Flanged Drywall Hard Ceiling		Industrial	INC 120V 2-Wire Incandescent (100%-1%)		
		50K 5000K			

¹Trimless mounting options do not require finish
²Factory Installed