

## FIXTURE SPECIFICATIONS

### INTENDED USE



The specification grade **Alcon Lighting i44 Commercial LED Linear Surface Direct Down Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior flush mount lighting applications. Our modern, slim profiles and stylish ceiling light fixture designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

### AVAILABLE LENGTHS

- 2FT** | W 4" x L 24" x H 4"
- 4FT** | W 4" x L 48" x H 4"
- 8FT** | W 4" x L 96" x H 4"
- Custom Length** | Consult Factory

### FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel
- Lens:** Snap In Frosted Acrylic
- Mounting:** 48" Adjustable Aircraft Cable, 3 Wire Power feed/cable  
*White or Silver Finish Pendant supplied with a White Cable.*  
*Black Finish Pendant supplied with a Black Cable.*
- Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire
- CRI:** 83
- Life:** 50,000 Hours
- Listings:** cETLus Listed, Title 24 Listed

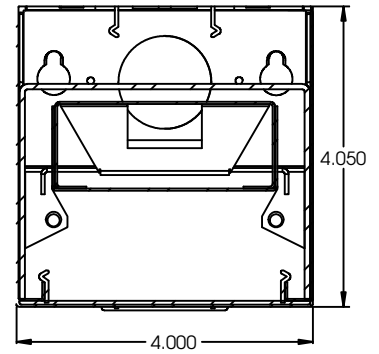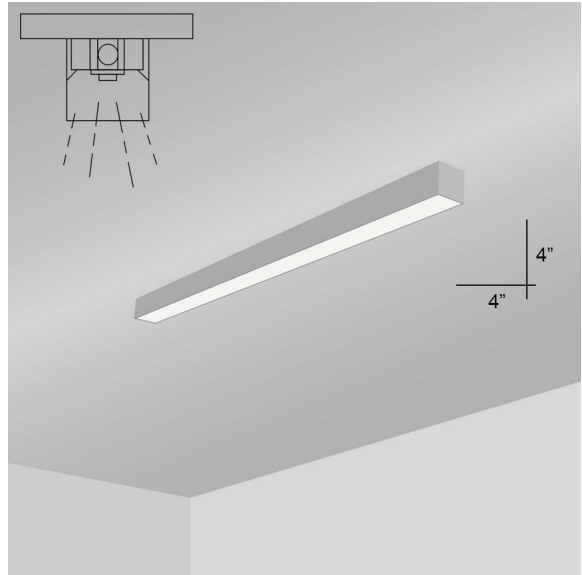

## ORDERING INFORMATION Example: (11138-2-35K-D10-WH-EM)

Model	Length   Wattage   Lumens	Color Temp	Dimming Driver	Finish	Options
<b>11138</b> i44 Surface	<b>2</b> 2 Foot   30 Watts   3400 Lumens	<b>35K</b> 3500K	<b>D10</b> 120-277V 5-Wire 0-10V (100% -10%)	<b>WH</b> White	<b>CRWK</b> Continuous Row Wire Kit <b>EM</b> Emergency Backup Battery <b>DS</b> Integrated Daylight Sensor
	<b>4</b> 4 Foot   36 Watts   4200 Lumens	<b>40K</b> 4000K			
	<b>8</b> 8 Foot   72 Watts   8400 Lumens	<b>50K</b> 5000K	<b>INC</b> 120V 2-Wire Incandescent (100%-1%)	<b>BK</b> Black	
				<b>SL</b> Silver	