

FIXTURE SPECIFICATIONS

INTENDED USE


The specification grade **Alcon Lighting i44 Commercial LED Linear Pendant Direct Down Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear chandelier designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

- 2FT** | W 4" x L 24" x H 4"
- 4FT** | W 4" x L 48" x H 4"
- 8FT** | W 4" x L 96" x H 4"
- Custom Length** | Consult Factory

FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel
- Lens:** Snap In Frosted Acrylic
- Mounting:** 48" Adjustable Aircraft Cable, 3 Wire Power feed/cable
White or Silver Finish Pendant supplied with a White Cable.
Black Finish Pendant supplied with a Black Cable.
- Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire
- CRI:** 83
- Life:** 50,000 Hours
- Listings:** cETLus Listed, Title 24 Listed

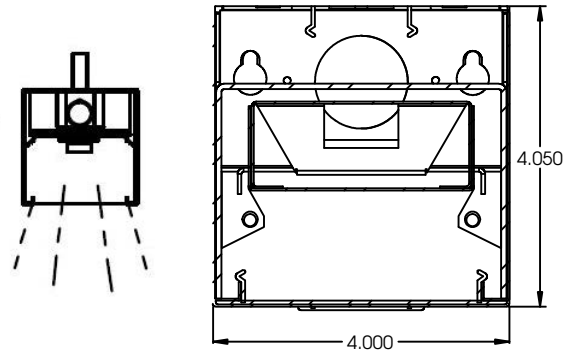

ORDERING INFORMATION Example: (12306-2-35K-D10-WH-EM)

Model	Length Wattage Lumens	Color Temp	Dimming Driver	Finish	Options
12306 i44 Pendant	2 2 Foot 30 Watts 3400 Lumens	35K 3500K	D10 120-277V 5-Wire 0-10V (100% -10%)	WH White BK Black SL Silver	CRWK Continuous Row Wire Kit EM Emergency Backup Battery DS Integrated Daylight Sensor
	4 4 Foot 36 Watts 4200 Lumens	40K 4000K			
	8 8 Foot 72 Watts 8400 Lumens	50K 5000K			
		Commercial	INC 120V 2-Wire Incandescent (100%-1%)		
		Industrial			