

FEATURES & SPECIFICATIONS

INTENDED USE

The **Alcon Lighting i44 Architectural LED Recessed Linear Lighting** fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

DETAILS

2 FT - W 4" x L 24" x H 4"

Construction: Die-formed and welded 22-gauge cold rolled steel

Lens: Snap In Frosted Acrylic

ADDITIONAL FEATURES

Type: Direct Downlight

Voltage: 120-277




Wattage: 30W (2x15W)

Lumens: 3400 lms

CRI: 83

Life: 50,000 Hours

Listings: ETL and DLC for LED component only
LED lamp included

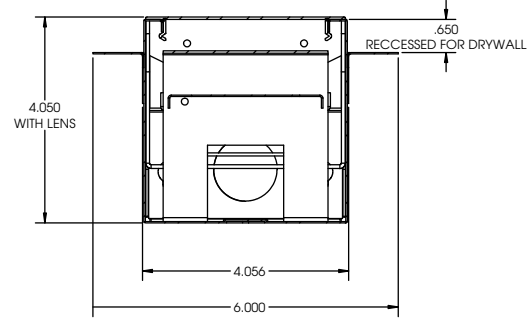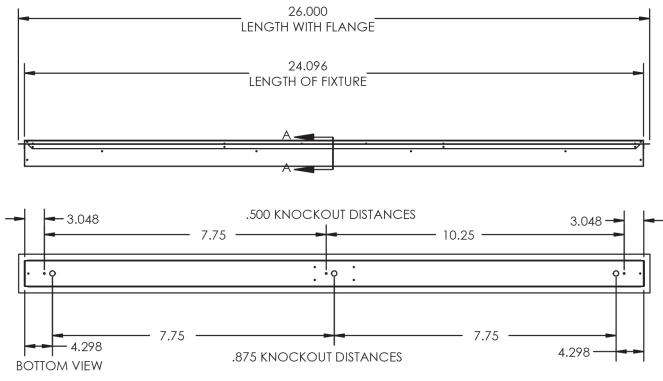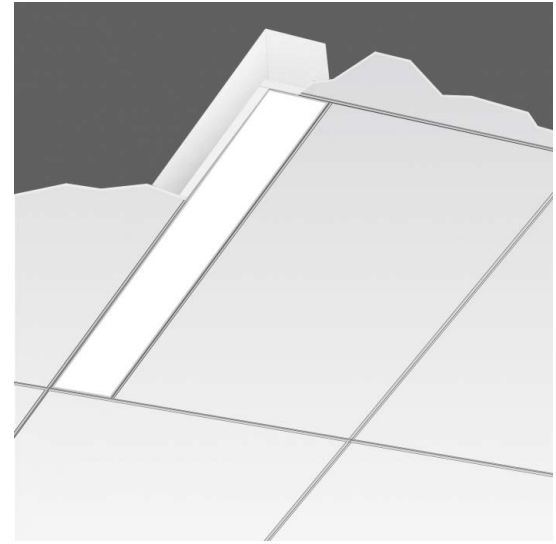

Ordering Information:

Example: (14102-2-R-35K-2W-EM)

Model	Color Temp	Flange Finish ¹	Dimming	Options
14102-2-R¹ Trimless T-Bar Grid Ceiling	35K 3500K 40K 4000K 50K 5000K	<i>(Required for RF only)</i> WH White BK Black SL Silver	Blank Non-Dimming <i>(Standard)</i> 2W 2-Wire Incandescent Dimming <i>(120V only)</i> <i>(Title 24 Compliant)</i>	EM² Emergency Backup Battery CRWK Continuous Row Wiring Kit DS² Daylight Sensor
14102-2-RR¹ Trimless Drywall Hard Ceiling				
14102-2-RF Flanged Drywall Hard Ceiling				

¹Trimless mounting options do not require finish
²Factory Installed