

FIXTURE SPECIFICATIONS

INTENDED USE



The specification grade **Alcon Lighting i44 Commercial LED Linear Recessed Direct Down Light Fixture** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear designs offer excellent direct down lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

- 2FT** | W 4" x L 24" x H 4"
- 4FT** | W 4" x L 48" x H 4"
- 8FT** | W 4" x L 96" x H 4"
- Custom Length** | Consult Factory

FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel
- Lens:** Snap In Frosted Acrylic
- Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire
- CRI:** 83
- Life:** 50,000 Hours
- Listings:** cETLus Listed, Title 24 Listed

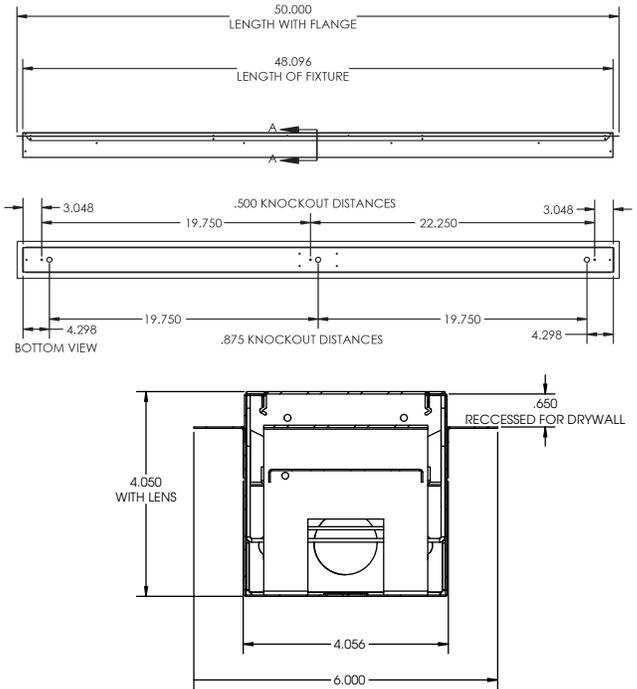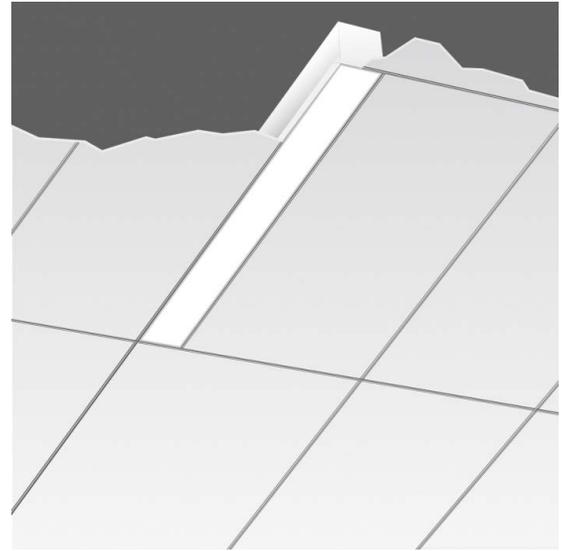

ORDERING INFORMATION Example: (12306-2-35K-D10-WH-EM)

Model	Length Wattage Lumens	Color Temp	Dimming Driver	Flange Finish	Options
14102-4-R¹ Trimless T-Bar Grid Ceiling	2 2 Foot 30 Watts 3400 Lumens 4 4 Foot 36 Watts 4200 Lumens 8 8 Foot 72 Watts 8400 Lumens	Commercial 35K 3500K 40K 4000K Industrial 50K 5000K	D10 120-277V 5-Wire 0-10V (100% -10%)	WH White BK Black SL Silver	CRWK Continuous Row Wire Kit EM Emergency Backup Battery DS Integrated Daylight Sensor
14102-4-RR¹ Trimless Drywall Hard Ceiling			INC 120V 2-Wire Incandescent (100%-1%)		
14102-4-RF Flanged Drywall Hard Ceiling					

¹Trimless mounting options do not require finish
²Factory Installed