

## FEATURES & SPECIFICATIONS

### INTENDED USE

The **Alcon Lighting Beam i66 Series Architectural LED Recessed Linear Lighting** fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

### DETAILS

**2 FT - W 6" x L 26" x H 6"**

**Construction:** Die-formed and welded 20 gauge cold rolled steel

**Lens:** Snap In Frosted Acrylic

### ADDITIONAL FEATURES

**Type:** Direct Downlight

**Voltage:** 120-277



**Wattage:** 30W (2x15W)

**Lumens:** 3400 lms

**CRI:** 83

**Life:** 50,000 Hours

**Listings:** ETL and DLC for LED component only LED lamp included

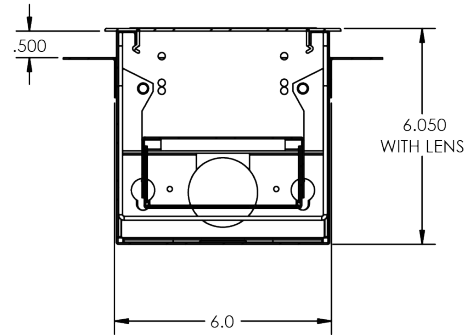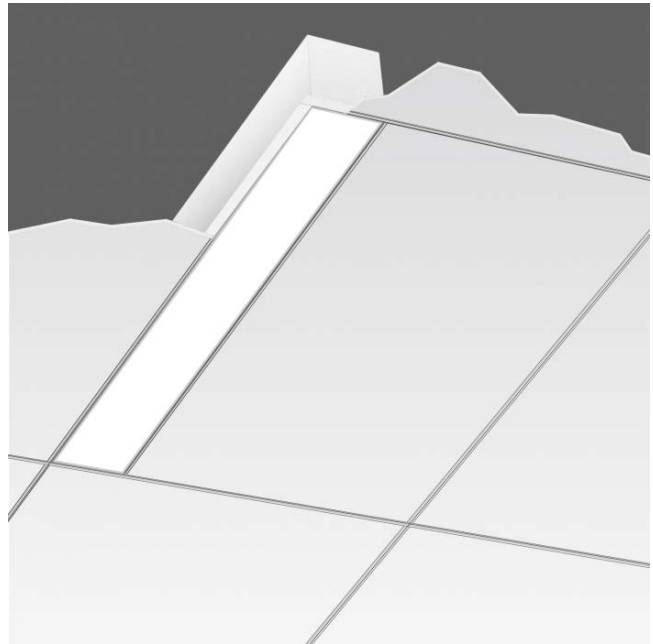

## Ordering Information:

Example: (14103-2-R-35K-2W-EM)

Model	Color Temp	Flange Finish <sup>1</sup>	Dimming	Options
<b>14103-2-R<sup>1</sup></b> Trimless T-Bar Grid Ceiling	<b>35K</b> 3500K <b>40K</b> 4000K	(Required for RF only) <b>WH</b> White <b>BK</b> Black	<b>Blank</b> Non-Dimming (Standard) <b>2W</b> 2-Wire Incandescent Dimming (120V only) (Title 24 Compliant)	<b>EM<sup>2</sup></b> Emergency Backup Battery <b>CRWK</b> Continuous Row Wiring Kit <b>DS<sup>2</sup></b> Integrated Daylight Sensor
<b>14103-2-RR<sup>1</sup></b> Trimless Drywall Hard Ceiling	<b>50K</b> 5000K	<b>SL</b> Silver		
<b>14103-2-RF</b> Flanged Drywall Hard Ceiling				

<sup>1</sup>Trimless mounting options do not require finish  
<sup>2</sup>Factory Installed