


avenue<sup>®</sup> a

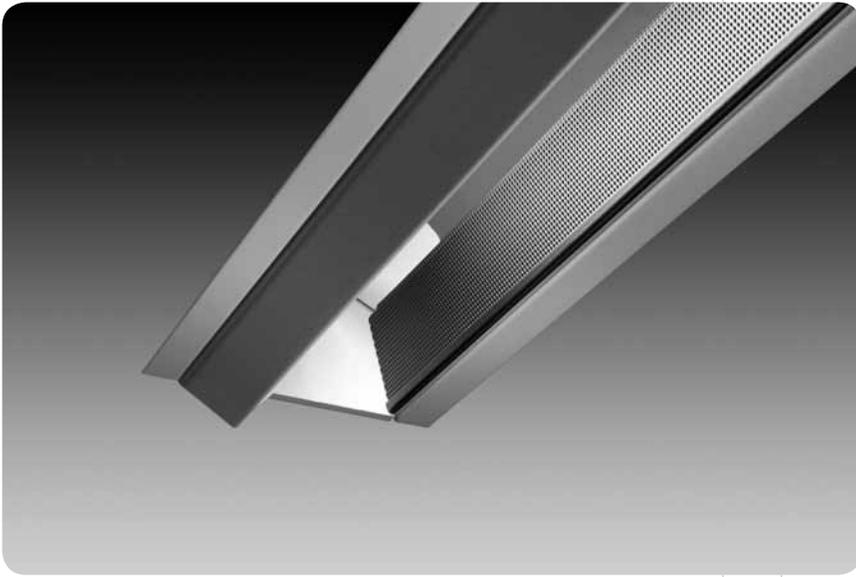

**features**

Narrow aperture high performance T5/T5HO asymmetric wall wash.

Precision micro-optic delivers shadow free illumination from the ceiling to the floor.


Features 2" narrow aperture for clean unobtrusive aesthetic.

Drywall installation is available, which allows for both individual or row mount capability.


Great solution for conference rooms, highlighting artwork, corridors, white board or any application that requires high levels of vertical illumination.

**dimensional data**

**Grid Mount**

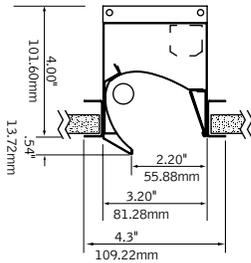

**Drywall Flange**

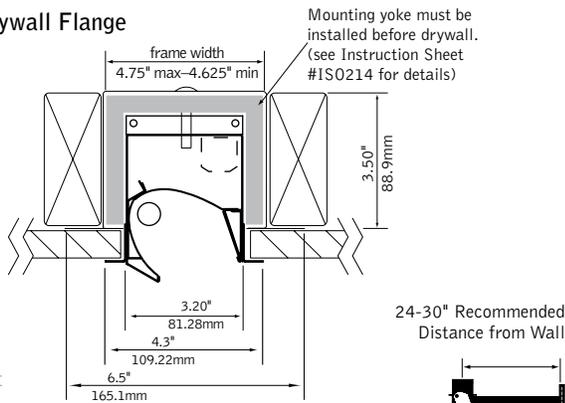

**detail**


**shielding options**



drywall row mount



open optic




clear lens

**companion luminaire**



mr16



linear




recessed wall mount

**performance**

1-Lamp T5HO  
57% Efficiency  
1933 cd @ 25°



Use in place of multiple halogen or compact fluorescent wall washers.

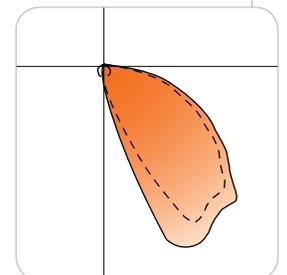

Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.



January 2012 D

fixture:

project:

## mounting information

### grid

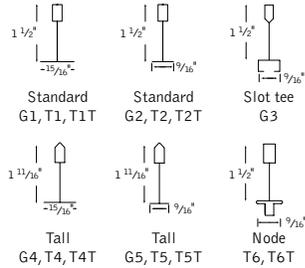

lay-in tile

tegular tile

### drywall

2' unit (cutout dimension: 3.5" x 23.6")

3' unit (cutout dimension: 3.5" x 35.6")

4' unit (cutout dimension: 3.5" x 47.6")

5' unit (cutout dimension: 3.5" x 59.6")

Drywall flange version provided with mounting yoke.

## specifications

### construction

One-piece 20 Ga. steel housing.

Grid luminaires include 20 Ga. steel, .5" wide universal flange rail.

Drywall flange option is provided with 20 Ga. steel, .5" wide flange kit and 20 Ga. galvanized steel mounting yoke.

2' unit weight: 5 lbs.

3' unit weight: 6 lbs.

4' unit weight: 7 lbs.

5' unit weight: 8 lbs.

### optic

.020" specular aluminum upper reflector and .020" semi-specular lower reflector.

24 Ga. perforated matte black diffuser with 24% opening.

please note:

radial cut-off louver FAVA-RL cannot be field installed on the non-shielded profile FAVA-NS.

### electrical

Luminaires are individually wired for specified circuits.

Thru-wiring not available.

Electronic ballasts are thermally protected and have a Class "P" rating.

Optional dimming ballasts available.

Consult factory for dimming specifications and availability.

UL and cUL listed.

### finish

Polyester powder coat applied over a 5-stage pre-treatment.

Perforated diffuser always finished in Matte Black.

## ordering

### luminaire series

Avenue A FAVA

FAVA

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


\* for more information see Reference section.

avenue® a



Filename: FAVANS1T5H.IES  
 Catalog #: FAVA-NS-1T5H0-1C-120-S-G-WH-4'  
 Efficiency: 57%  
 Test #: 12355.0

CANDLEPOWER DISTRIBUTION

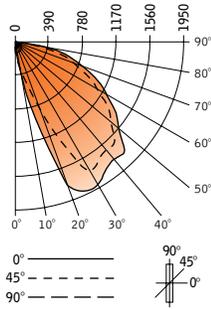





Vertical Angle	Horizontal Angle				Zonal Lumens
	0°	22.5°	45°	67.5°	
0°	108	108	108	108	108
5°	276	256	214	154	101
15°	919	771	499	291	102
25°	1933	1873	1300	415	101
35°	1832	1799	1695	707	96
45°	1806	1775	1647	1296	88
55°	1434	1416	1329	1108	74
65°	1072	1052	962	811	56
75°	655	631	568	458	39
85°	317	294	224	129	14
90°	183	165	112	40	2
95°	0	0	0	0	0
105°	0	0	0	0	0
115°	0	0	0	0	0
125°	0	0	0	0	0
135°	0	0	0	0	0
145°	0	0	0	0	0
155°	0	0	0	0	0
165°	0	0	0	0	0
175°	0	0	0	0	0
180°	0	0	0	0	0


LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt	
0°-30°	376	7.5	13.2	
0°-40°	784	15.7	27.4	
0°-60°	1975	39.5	69.0	
0°-90°	2861	57.2	100.0	
<b>Total Luminaire</b>	<b>0°-180°</b>	<b>2861</b>	<b>57.2</b>	<b>100.0</b>


# avenue a grid ceiling configurations

Avenue A is configured at our factory to integrate easily with your specified grid type, tile style and fixture position. Please review the below options and choose the mounting code that matches your application.

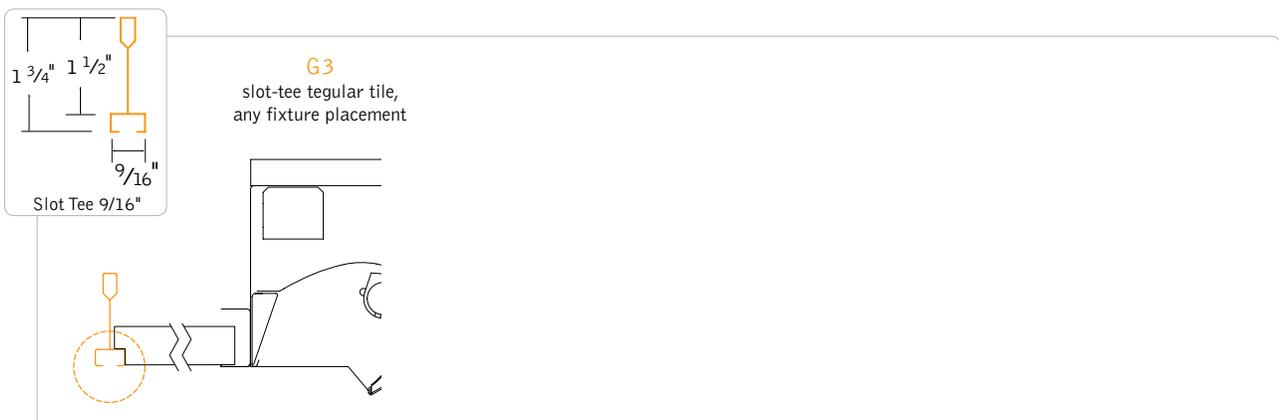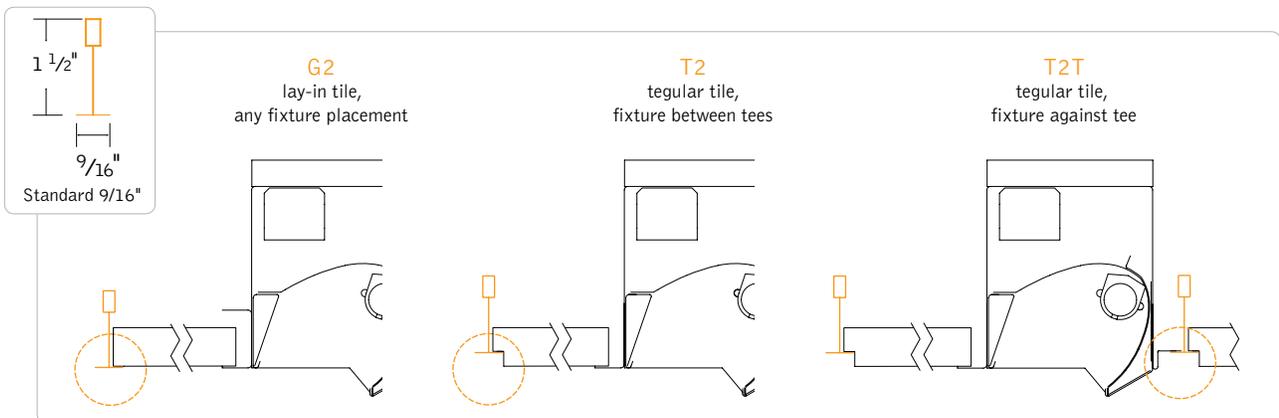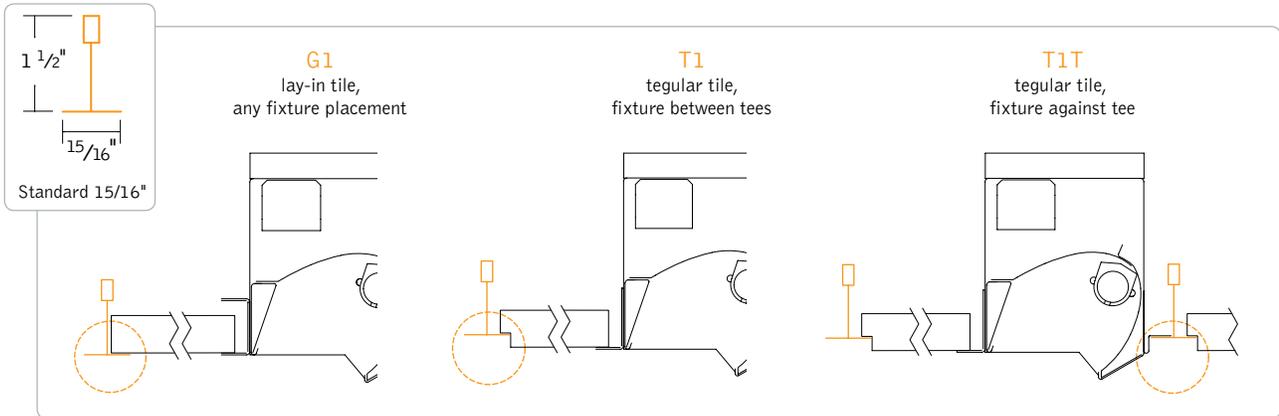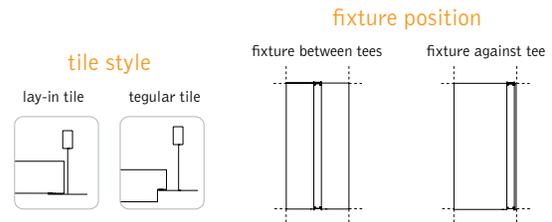






**G4**  
lay-in tile,  
any fixture placement

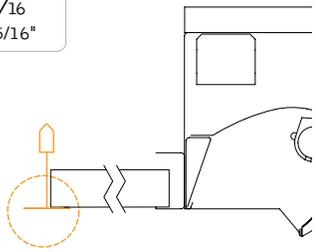


**T4**  
tegular tile,  
fixture between tees

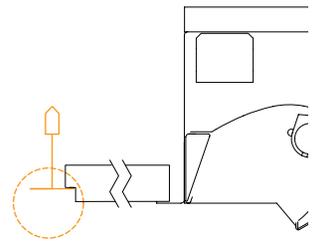


**T4T**  
tegular tile,  
fixture against tee

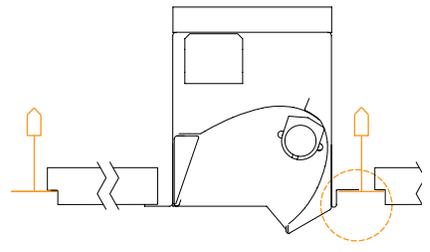



**G5**  
lay-in tile,  
any fixture placement

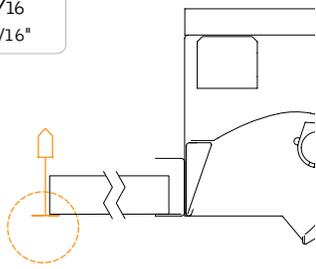


**T5**  
tegular tile,  
fixture between tees

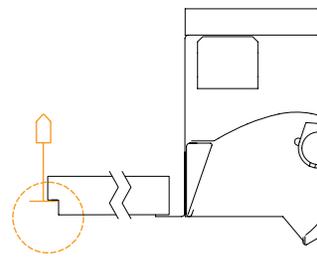

**T5T**  
tegular tile,  
fixture against tee

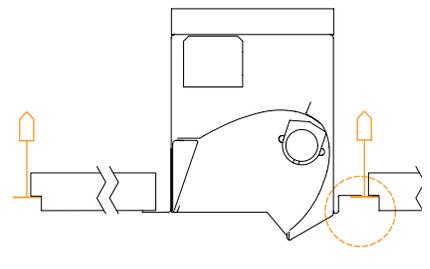

**T6**  
tegular tile,  
fixture between tees

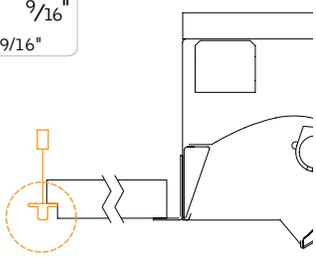

**T6T**  
tegular tile,  
fixture against tee

