


14122 – INSTALLATION INSTRUCTIONS

Preparation

- Read these instructions carefully and completely before beginning installation. If you are not familiar with electrical systems, the luminaire must be installed by a licensed electrician.
- Verify that the ceiling construction meets all applicable requirements before proceeding. Installation and operation must comply with local electrical codes and regulations. Refer to (FIG. B) for construction guidelines.

⚠ Caution

- Maintain a minimum clearance of 3" between ceiling insulation and the housing sides.
- No insulation is permitted directly above the housing.
- Install the housing at least 1/2" away from combustible materials such as wooden joists, subflooring, or roofing (FIG. E).

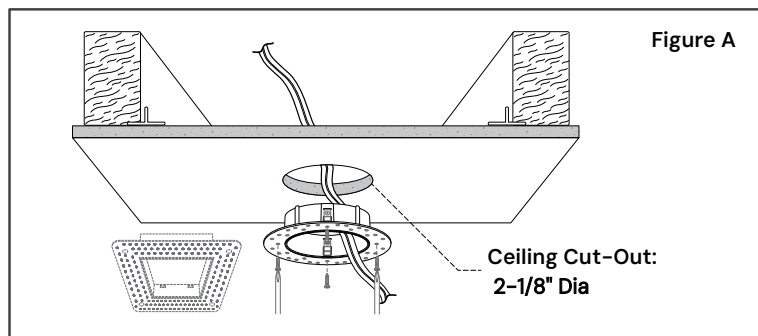

STEP 1


Ceiling Cut-Out

- Mark a circle or square in the desired location. Cut the opening precisely to 2.125" diameter or square (FIG. A)
- Secure the trimless plaster ring to the ceiling using appropriate screws (provided by others).



STEP 2

Trimless Ring Plastering

- Apply plaster compound around the installed trimless ring and feather it outward to create a seamless, trimless finish (FIG. B).
- Remove any excess compound from inside the ring opening to ensure proper fit.

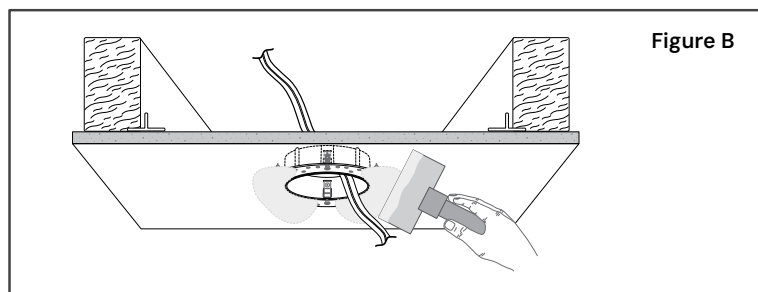

14122 - INSTALLATION INSTRUCTIONS

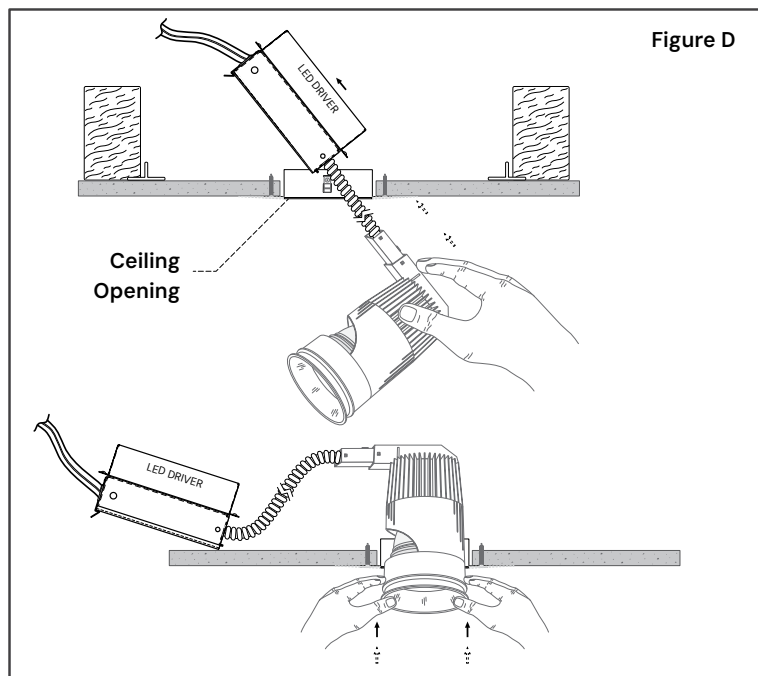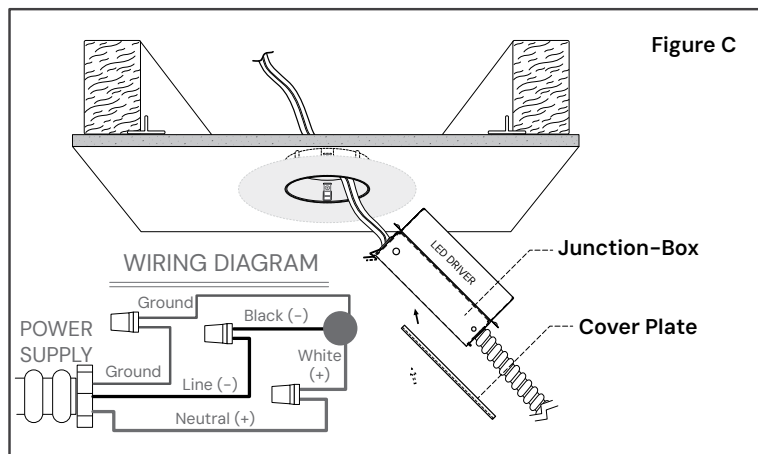

STEP 3

Electrical Connections

- **Important:** Before handling any wiring, turn off power at the circuit breaker. A wall switch is not sufficient to ensure safety.
- Use supply wire rated for at least 194°F. If the building was constructed before 1985, confirm wire rating or consult a licensed electrician.
- Connect the power supply to the luminaire junction box using appropriate wire connectors (provided by others) as shown in the wiring diagram (FIG. C).
- Once connections are complete and wires are safely inside the junction box, replace the cover plate.

STEP 4

Housing Installation

- Insert the luminaire housing into the prepared ceiling opening (FIG. D).
- Push the trim into place evenly until the retention clips engage and secure it in the ceiling.

STEP 5

Final Installation

- Ensure the fixture is properly secured and that clearances comply with safety requirements (FIG. E).

