

m o o o i[®]



Prop Light Round

by Bertjan Pot

"We have round lights, we have straight lights. We have them with lights on one side, we have them with lights on two sides. ..."

Designer

Bertjan Pot

Year of design

2013

Material

HIPS housing; PMMA lightguide; Glass bulbs

m o o o i[®]

detailing



Prop Light is equipped with a comfortably warm LED light source, spreading it's light by a specially developed optics. All versions are dimmable.

colours



White body
RAL9016

packaging

Prop Light Round

H 50 cm | 19,7"
W 85 cm | 33,5"
D 85 cm | 33,5"

Colli 1/1

Product weight:
7 KG | 15,4 lb
With packaging:
15 KG | 33,1 lb

Prop light Round Double

H 50 cm | 19,7"
W 85 cm | 33,5"
D 85 cm | 33,5"

Colli 1/1

Product weight:
9 KG | 19,8 lb
With packaging:
15 KG | 33,1 lb

Prop Light Round Double Vertical

H 50 cm | 19,7"
W 85 cm | 33,5"
D 85 cm | 33,5"

Colli 1/1

Product weight:
9 KG | 19,8 lb
With packaging:
15 KG | 33,1 lb

technical



input voltage:

110-240V ~50Hz AC

amount of LED's:

Prop Light Round Single: 48
Prop Light Round Double: 96

colour temperature (degrees Kelvin, K) / colour rendering index:

Approx. 2000K / CRI_Ra min. 80
NEW: 2700K version now available!

luminous flux (Lumen, lm):

Prop Light Round Single: 1078.51lm
Prop Light Round Double: 1936.03lm

power consumption:

Prop Light Round Single: MAX 21W
Prop Light Round Double: MAX 42W

canopy:

matching white pebble


cable length & colour:

4M | 13ft, transparent

dimnable:

yes, mains dimmable



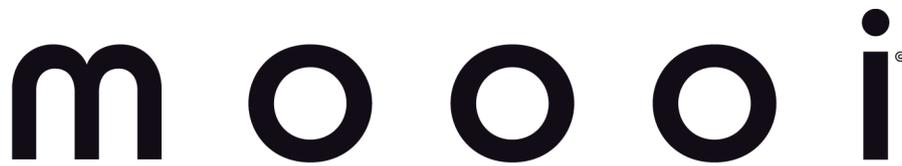

recommended dimmers

Lutron

Skylark - S-600P/CT-603P
Nova - NF-10
Nova-T - NFT-10
Diva - DVSCCL-153P
Diva - DVCL-153P/DVWCL-153P
Diva - CTCL-153P
Diva - TTCL-100H
Diva - DV-600P
Maestro - MA-600
Lyneo - LLSI-501/LLSI-502 (230V/240V)
LQSA-4A-D & QSNE-4A-D
Grafik Eye QSG-3/4/6P-CE
Rania RNDI-252 (230V/240V)

Leviton

IllumaTech - IPI06/IPI10/RPI06
Sureslide - 6621/6631
Vizia - VPI06

ELKO

Gli - ELKO 400 Gli (230V/240V)

Jung

Jung 225 TDE

IMPORTANT! The use of a non-recommended dimmer can lead to unexpected dimming behavior and even non-repairable damage of the fixture and/or driver.

cleaning instructions

Can be effectively cleaned using a regular household dust cloth or feather duster. Lightly dust inbetween each component when the lamps are not in use. Moooi recommends always reading the label of any cleaning products you wish to use on or near any item from the Moooi collection. For further information on how to clean this product please contact your nearest Moooi agent or dealer which can be located through our website.

dimensions

