

INSTALLATION INSTRUCTIONS

PART LIST

A: Lens

B: LED module plate


C: BX cable connector

D: Self-drilling anchor screw

E: Washer


F: J-box

G: Screws

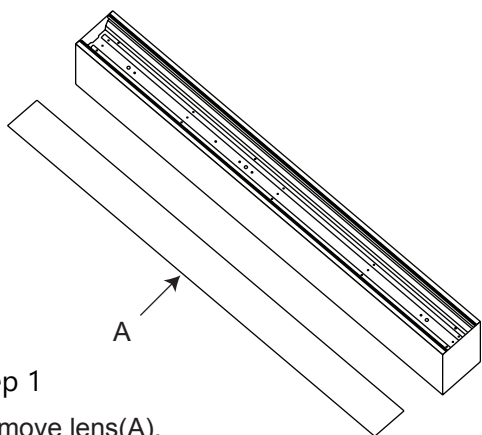


Step 1

Remove lens(A).

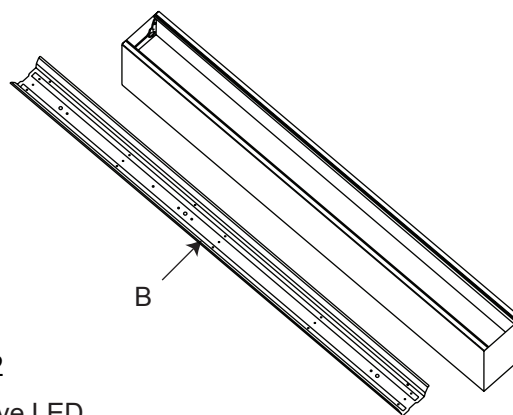


Step 2

Remove LED module plate (B).

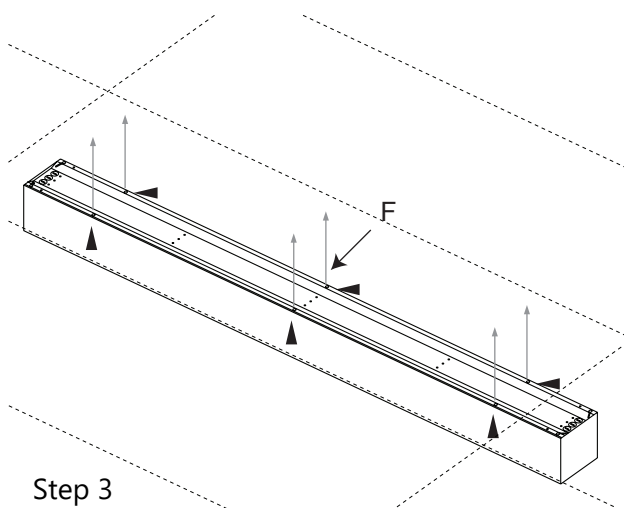

Step 3


Align fixture to ceiling to mark holes and locate J-box(F).



Continuous Row

Step 3A

Align continuous row fixtures in numerical order under the same alphabet family.

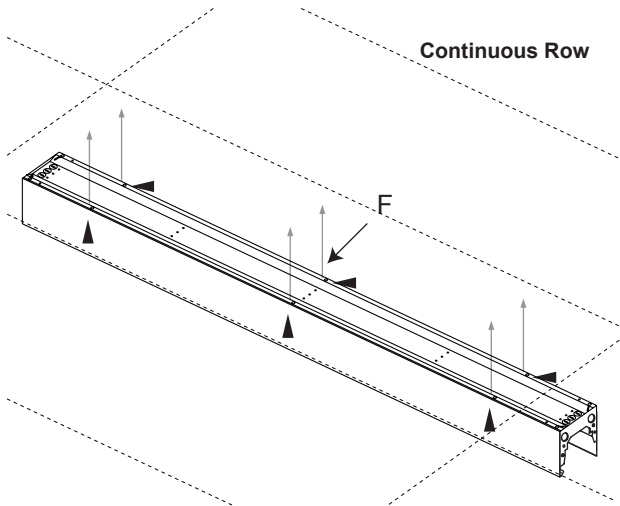


Step 3B

Align all continuous fixtures to ceiling to mark holes and locate J-box(F).


COUNTINUOUS ROW

Adhesive foam gasket must be installed

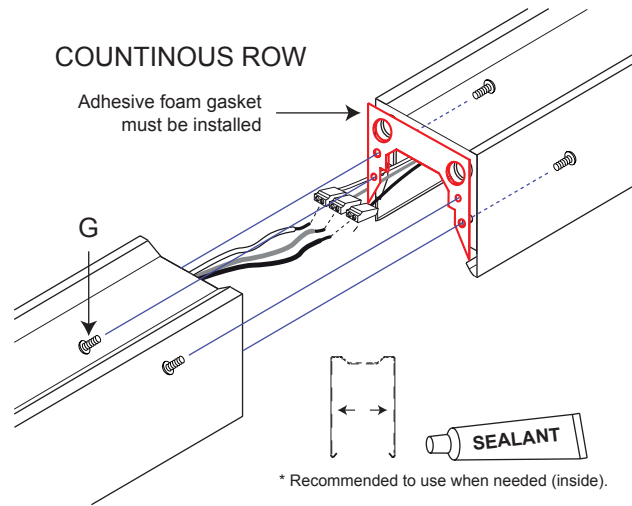


Step 3C

- 1) Make wiring connection from each fixture power supply wires together.
- 2) Align fixtures and screw together with 4 screws(G).

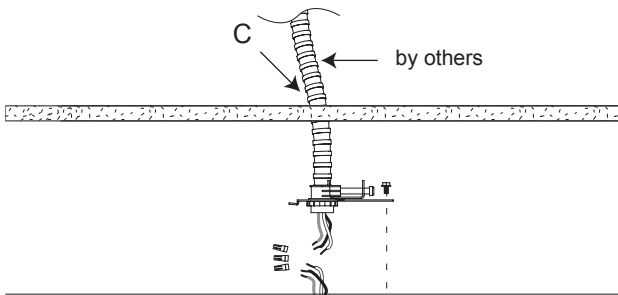

Step 4

Knockout hole for BX cables(C) and make wire connection to Fixture wires.

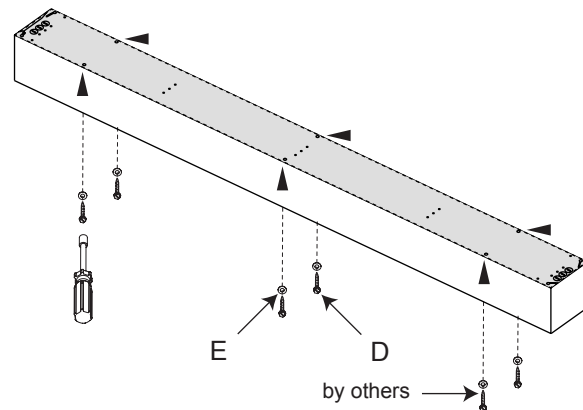


Step 5


Screw fixture to ceiling using Self-Drilling Spiral Anchors(D) with washer(E).



INSTALLATION INSTRUCTIONS

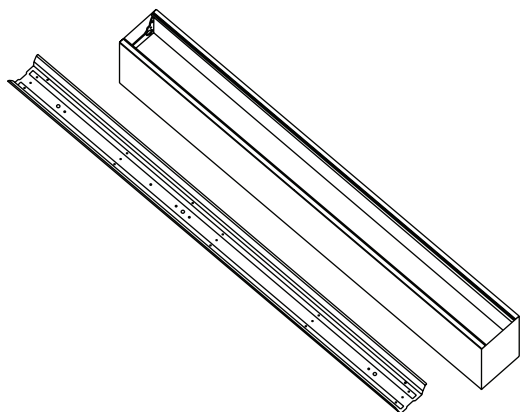

Step 5
Install LED module plate.

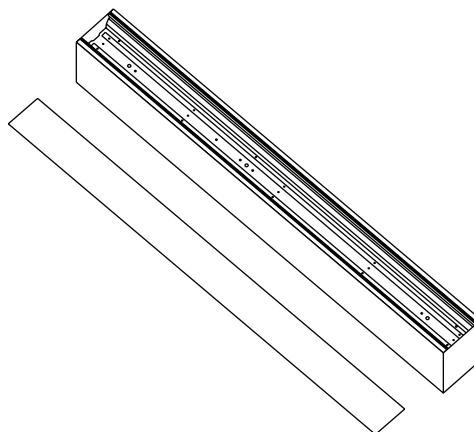

Step 6
Close Lens.