


## **WARNINGS**

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each luminaire must be properly supported during install.
- DO NOT join fixtures on the floor prior to lifting, or damage will occur.



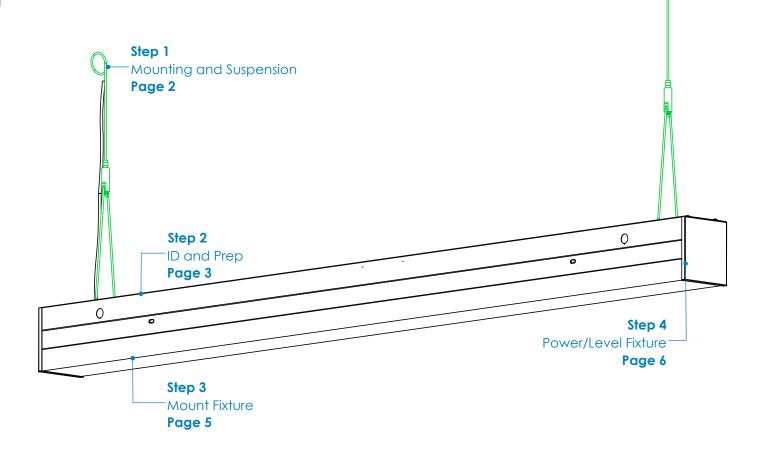

# **Step 1 -** Mounting and Suspension


## **Mounting With Hanging Kit**

- Install hanging kit on secure structure
- Ensure cables are installed at mounting locations
- Adjust cables to desired length

## **Suspension Locations**

**X** = Suspension Dimensions

Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

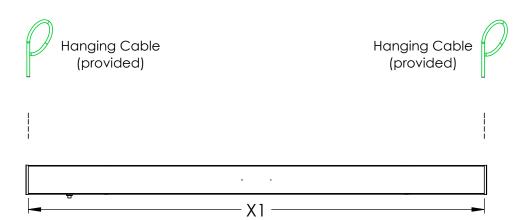



# **Step 2 -** Identification and Preparation

## A. Identify Fixtures

# **Alcon Lighting**

Part# 12100-X-X

VOLTAGE: 120-277, 50-60HZ


WATTAGE: XX MAX FLUX: XXXX LUMENS

CCT: XXXX

DATE CODE: XX/XX/XX


TYPE: XX

#### **B. Tools Needed**





Safety Glasses



Drill (optional)

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

#### Kitted Hardware

- Items Provided are listed here.
   These items can be found in separate boxes shipped with the fixture.
- Ensure all parts are accounted for and set them aside until needed.
- Any additional hardware needed for this installation will be provided by others.





Pendant Mount Kit



# Step 3 - Mount the Fixture


## A. Install Hanging Kits





- Install hanging kit on end with pre-installed power cable first.
- To install, rotate the paddles and insert into keyways of the fixture.

# **B.** Connect Fixture Wiring



WIRING LEGEND		
BLACK	НОТ	LINE VOLTAGE
WHITE	NEUTRAL	LINE VOLTAGE
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- This model comes with a pre-installed power cable and junction box.
- Wire the fixture to incoming power supply according to all local, state and national codes.
- Do not power the fixture until the next step is complete.




# **Step 4 -** Power and Level the Fixture

## A. Secure the Power Cable

# Secure Power Cable To Pendant Using Zip Ties

## B. Level the Fixture

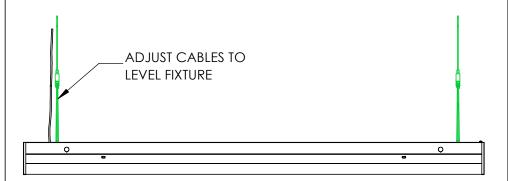

- Secure the power cable to the pendant cable using zip ties.
- Secure the power cable to the power feed canopy using the cable strain relief.
- Make final adjustments to cables, ensuring fixture is level.
- Fixture install is now complete.