

Catalog No.:

Job/Title:_____

Notes:

SPECIFICATION SHEET 2-Gang Floor Box **Assembly Pop-up Type**



DESCRIPTION:

Orbit's 2-Gang Floor Box Assembly Pop-up Type are used for either carpet, tile, or wood floors. Ears on the floor box are installed flush to finished floor using screws before installing the cover. Pop-up covers are accessible when needed and can be retracted when not in use. Covers have tamper resistant receptacles and are available either round or square. In addition, Orbit's covers are available in Brass or Stainless Steel with additional colors available upon request.

FEATURES:

- 125 VAC •
- For use with carpet, tile or wood floors
- Steel floor boxes must be installed flush with finished floor prior to final installation
- Includes cover, receptacle, screws and 2-Gang Floor Box
- Meets NEC Article 406.12 for tamper-resistant receptacles •




SPECIFICATIONS:

		Cover Style		
Cat. No.	Вох Туре	Receptacle	Color	Std. Pkg.
FLBPU-DD-BR		2 Duplex	Brass	10
FLBPU-DD-SS		2 Duplex	Stainless Steel	10
FLBPU-LL-BR	2-Gang Box (4" x 7-7/8" x 3"	2 Low-Voltage (RJ45)	Brass	10
FLBPU-LL-SS	(4 x 7-7/8 x 3 86.0 Cu. In.)	2 Low-Voltage (RJ45)	Stainless Steel	10
FLBPU-DL-BR		Duplex + Low-Voltage (RJ45)	Brass	10
FLBPU-DL-SS		Duplex + Low-Voltage (RJ45)	Stainless Steel	10

Floor Box Specifications:

	Knock		
Floor Box	Sides	Bottom	Cu. In.
	(6)-1/2" CKO &		
2-Gang Pop-up	(6)-1" CKO	(6)-1/2" & (3)-3/4"	86.0

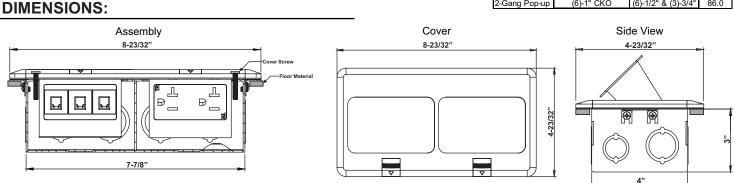



www.orbitelectric.com

Application and Performance Specification Information is Subject to Change Without Notification LOS ANGELES, CA 1-800-90-ORBIT

uμ	(0)-1	0110	(0)=1/2 G
			Side View
			4 00/001