


Two keyholes and two additional knockouts on the back

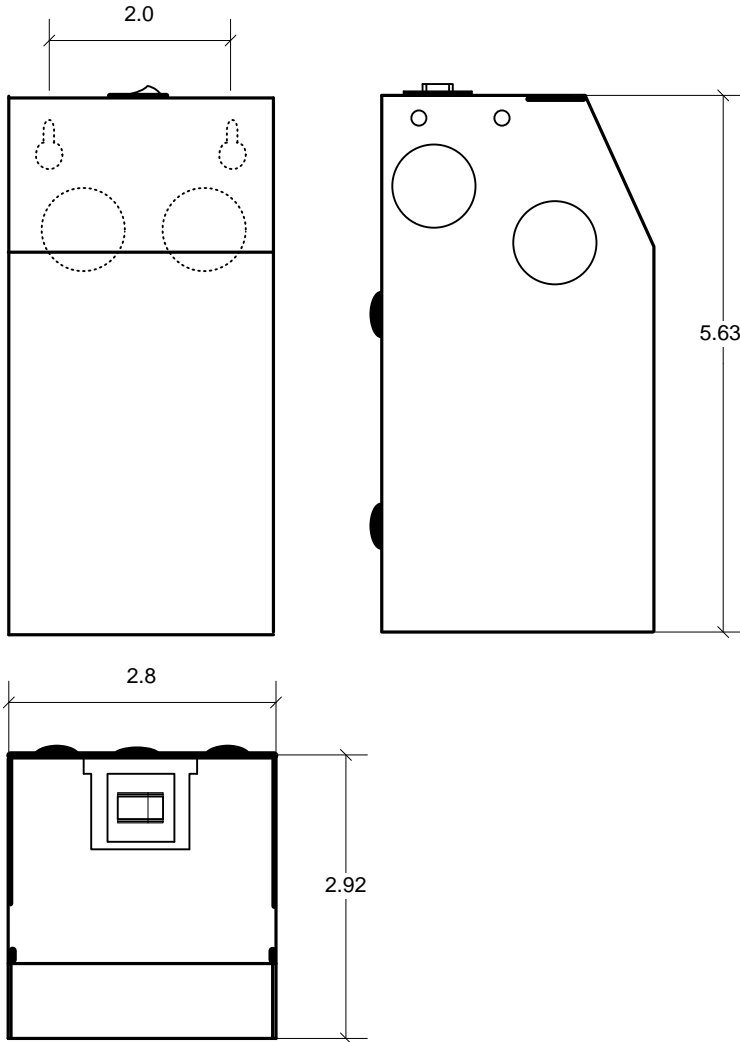

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.2A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 50VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output leads are 18 AWG. 600V. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 7A circuit breaker on the secondary side.
9. Wiring compartment has 4 side and 2 back knockouts sized for 3/4 inch screw cable connectors.
10. The removable cover for the wiring compartment is secured in place by clips.
11. The enclosure is black powder coated.
12. The Transformer is UL listed. UL file number: E194005.
13. The label contains Technomagnet's catalog number and electrical rating.
14. The boost tap option is indicated by the marked check box on the label.

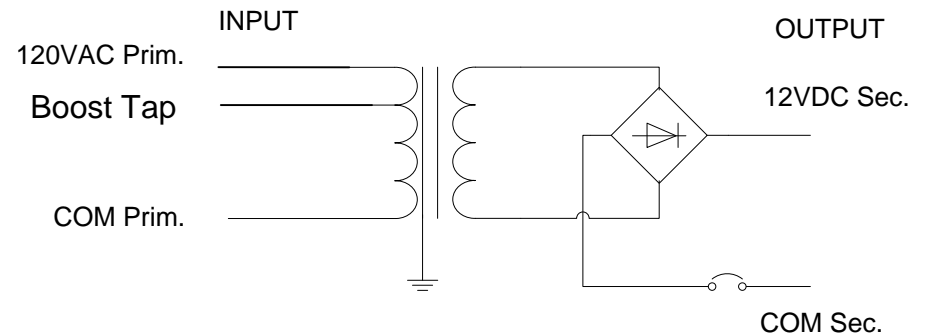


Table 1.

Output Volts	
120AC	Boost
11.8	12.8

		15414 Cabrito Road Unit A Van Nuys, CA 91406				
				Interactive Lighting Servers		
DRW. CHK. APR. Part #TMC – 50SDC	Name	Date		Page 1	Scale: no scale	
				Of 1	Tolerance: ±	
					Title: Compact indoor 12VDC 50VA Low voltage Transformer.	
	Rev. A					