

FEATURES & SPECIFICATIONS

INTENDED USE

The Alcon Lighting **Siena** Architectural LED Directional Up Light Fixture features naturally etched finishes capable of withstanding the test of time. The Siena Directional Uplights are ideal for architectural landscape lighting applications.

DETAILS

L 7.5" x **Dia** 2.375"

Construction: Corrosion Resistant Cast Brass

Lens: Clear and heat resistant convex glass

Wiring: Prewired with a 5' 18-2 SPT2-W direct burial cord

Socket: Top grade fixed ceramic bi-pin with retention clip

Gasket: Silicone gasket for water tight seal

Knuckle: Adjustable cast brass with thumb screw and 1/2" NPT threaded male hub

Mounting: 1/2" NPT threaded female hub (1/2" NPT Spike included)

Electrical: Remote 12V transformer required (Not included)

Halogen Equivalent: MR16, 25W or 50W

ADDITIONAL FEATURES

Voltage: 12V AC/EDC

Color Temperature: 2700K

CRI: 80

Ambient Temperature: -22°F - 122°F

Life: 50,000 Hrs

Warranty: Limited Lifetime Warranty
5 Year Limited Warranty on LED



Mounting Accessories:




Mounting Stem



Mounting Canopy



Mounting Pedestal

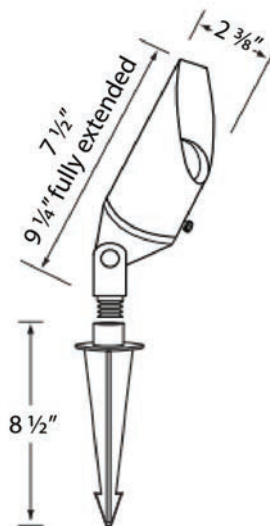

Ordering Information:

Example: (9011-3.5S-BZ)

Model	Wattage/Lumens/Optics	Finish	Mounting	Options
9011	3.5S 3.5W / 270 lms / 15° Spot 3.5F 3.5W / 270 lms / 45° Flood 3.5WF 3.5W / 270 lms / 60° Wide Flood 5S ' W / & " lms / 15° Spot 5F ' W / & " lms / 38° Flood 5WF ' W / & " lms / 60° Wide Flood	BZ Bronze GM Gun Metal	(Blank) 1/2" NPT Spike Included MC Mounting Canopy MS6 6" Mounting Stem MS12 12" Mounting Stem MS18 18" Mounting Stem MS24 24" Mounting Stem MP 18" Mounting Pedestal (Black Finish)	UWC Universal Wire Connector