

Type:	Project:	Qty:
	Date:	
Catalog #:		

Description:

The Regolo LED wall series is a narrow, nominal 4" wide, profile unit. The slender design is ideal for corridors, open and private offices, classrooms, lobbies and general purpose rooms.

Specifications:

Construction: The housing consists of visible extruded aluminum side rail with formed cold rolled steel back channel and heavy gauge end caps. Housing can be joined together for continuous row applications. Standard finish is powder coat textured white. Optional silver, black or custom color paint finishes.

Reflector / Driver: Reflector / driver cover is finished with high reflectance white paint. Optional asymmetric semi-specular aluminum reflector. Standard constant current electronic driver with 0-10V dimming input; dimming range from 100% down to 10%. Universal (UNV) voltage is from 120 - 277V, 50/60 Hz.


Direct Shielding: Extruded frosted or satin white acrylic snap-in lens with DR. Consult factory for upright shielding.

LED Module: Distributed LED array in a variety of lumen output packages. LED color is available in (L30) 3000K, (L35) 3500K or (L40) 4000K. Module is replaceable. L90 ≥ 100,000 hours.

Mounting: Wall mount, individual mount or continuous runs.

Labels: ETL listed, conforms to UL Standard 1598 / 8750 and CSA Standard C22.2, Damp location.

Warranty: 5-year limited warranty on LED and Driver.

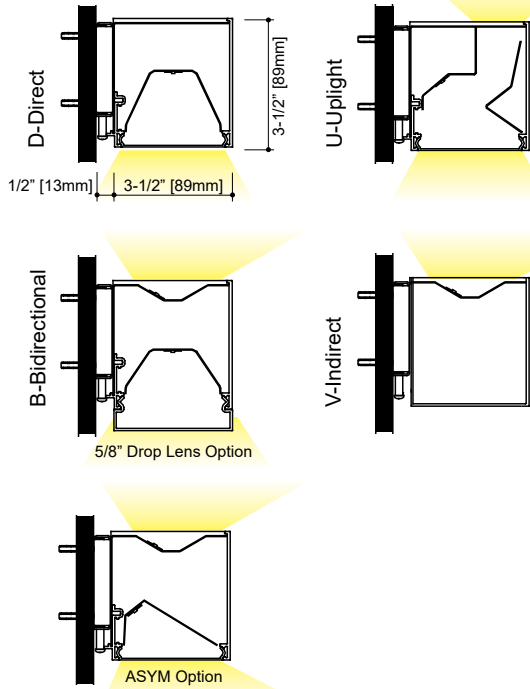

Ordering Information

Sample: RW4-4V-06L35-UNV-D-1C-BK-20'

Series	Height / Distrib.	Lumen Package ⁴ / Color	Voltage	Driver	Circuit	Shielding	Color	Length	Options	
RW4										
RW4 (Wall - Nom. 4")	4	D Direct	03 (~391 lm/ft, 3.50W/ft)	L30	UNV	1C Single Circuit 1E Single Circuit w/ EM Circuit 1B Single Circuit w/ Battery Pack 2C ⁷ Dual Circuit 2E ⁷ Dual Circuit w/ EM Circuit 2B ⁷ Dual Circuit w/ Battery Pack	FRF (Frosted Flush) FRD (Frosted Drop Opaque End) FRL (Frosted Drop Luminous End) STF (Satin White Flush) STD (Satin White Drop Opaque End) STL (Satin White Drop Luminous End) Blank - Indirect (Standard No Lens)	WH (White - Standard) BK (Black) SV (Silver) CC (Custom Color)	2' 3' 4' 5' 6' 7' 8' Continuous Runs⁸ XX' Specify run length in 1 foot increments. Consult factory for custom lengths.	ASYM ⁹ Asymmetric Reflector Direct GLR Fusing
		B ¹ Bidirectional	05 (~570 lm/ft, 5.25W/ft)	L35	120					
		U ² Uplight	06 (~726 lm/ft, 6.83W/ft)	L40	277					
		V ³ Indirect	09 (~881 lm/ft, 8.43W/ft)							
			10 (~1033 lm/ft, 10.1W/ft)							
		Consult Factory for Custom Lumen Package		Dimming (0-10V) D ⁵ (Dim to 10%) D1 ⁶ (Dim to 1%) D0 ⁶ (Dim to 0%) Lutron Dimming See Page 2 for Ordering Codes DALI Dimming eldoLED ECOdrive ELE (Dim to 1%) eldoLED SOLOdrive ELS (Dim to 0%)						



Notes:


- Standard Watts per Foot: (03) 6.42W/ft, (05) 9.50W/ft, (06) 12.3W/ft, (09) 15.2W/ft, (10) 18W/ft. For Bidirectional with not the same output, specify lumen package down / lumen package up (ie. 05DN/09UP-L35).
- Only available in 1 foot increments.
- No lens is standard for Indirect distribution. Consult factory for lens option.
- Nominal lumen output per foot for frosted lens and 3500K.
- Standard driver, don't connect low-voltage wires for non-dimming applications. Consult factory for specifications and manufacturer.
- Consult factory for specifications and manufacturer.
- Bidirectional ONLY. Not all options are available for luminaires under 4 foot.
- 6" increments are common custom lengths. We can provide custom run length down to the nearest (+/- 1/8").
- Asymmetric reflector for Direct component with Frosted Flush lens. Not available in Uplight or Indirect.



Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2016 Rev.D1 Nulite reserves the right to bulk package any order.

Lens Options

Shielding




Frosted Lens
This diffuser is designed for a balance between efficiency and lens uniformity. (Transmission ~ 89%)

Satin White Lens
This diffuser is designed for visible lens uniformity. It's recommended for regressed lens configuration in our shallow housing. (Transmission ~ 69%)

Position



Drop Lens w/ Opaque End




Drop Lens w/ Luminous End

Lutron Driver Ordering Codes


Nulite Code	Lutron Prefix	Lutron Series	Dim Level	Control Type	
				3-Wire	Eco-System™
L11	L3DAE	Hi-lume™	1%		Yes
L12	L3DA3W	Hi-lume™	1%	Yes	
L15	LDE1*	Hi-lume™ - H Series	1%		Yes
L16	LDE5	5-Series	5%		Yes

* Soft-on, Fade-to-Black™

Wall Mounting Plate Detail

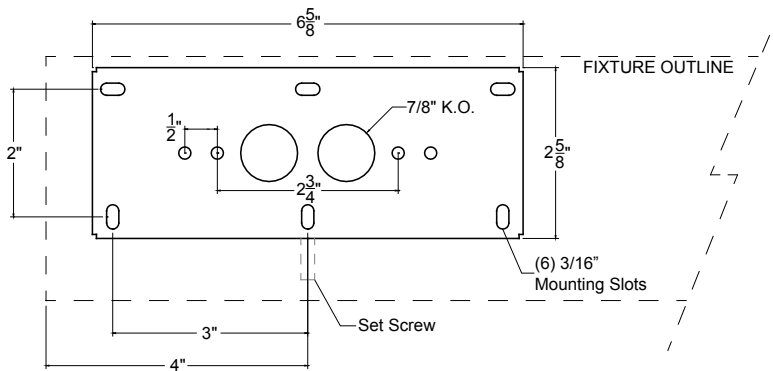

Individual Lengths

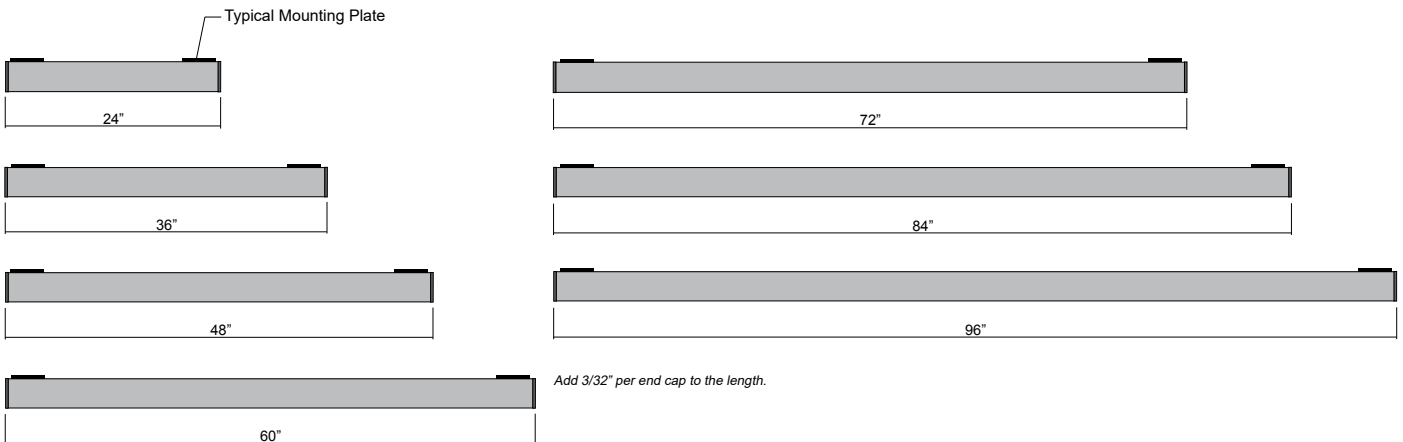


Specifications and dimensions are subject to change without notification.

Continuous Run Lengths


		Run Length																																																		
		2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'	16'	17'	18'	19'	20'	21'	22'	23'	24'	25'	26'	27'	28'	29'	30'	31'	32'	33'	34'	35'	36'	37'	38'	39'	40'	41'	42'	43'	44'								
Number of Housings	2'	1																																																		
	3'		1																																																	
	4'			1					1	1	1	1					1	1	1	1						1	1	1	1						1	1	1	1						1	1	1	1					
	5'				1				1				1					1				1					1							1					1								1					
	6'					1				1				1					1				1					1							1					1							1					
	7'						1				1				1					1				1					1							1					1							1				
	8'							1				1	1	1	1	1	2	1	1	1	1	2	2	2	2	3	2	2	2	3	3	3	3	4	3	3	3	4	4	4	4	4	5	4	4	4	4	5				

Add 3/32" per end cap to the length.

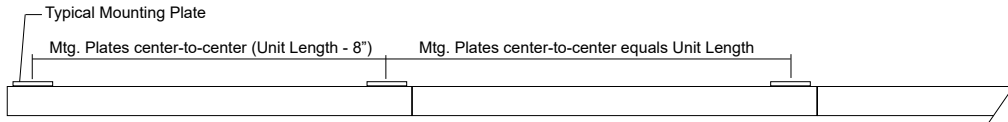


Photometric Curves


Cat. # RW4-4D-05L35-...-FRF-...-4'
 Frosted Flush Lens
 Wattage/ft - 5.25
 Lumens/Watt - 109

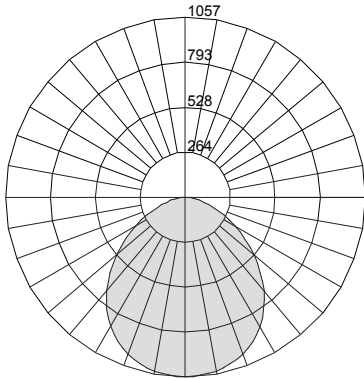


Cat. # RW4-4D-09L35-...-FRF-...-4'
 Frosted Flush Lens
 Wattage/ft - 8.43
 Lumens/Watt - 105

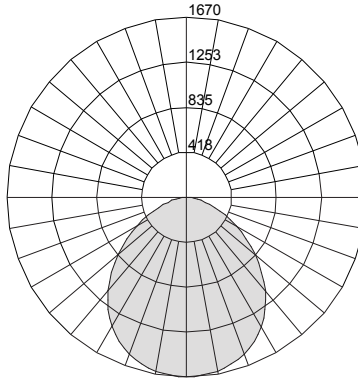


Cat. # RW4-4D-05L40-...-FRF-...-4'-ASYM
 Frosted Flush Lens
 Wattage/ft - 5.25
 Lumens/Watt - 110

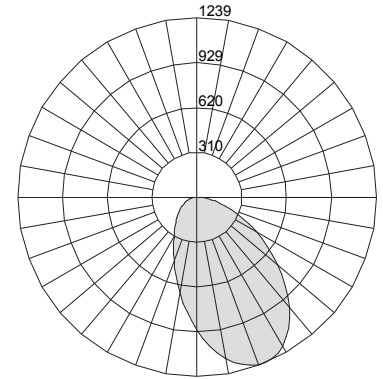

Cat. # RW4-4B-05L35-...-FRF-...-4'
 Frosted Flush Lens
 Wattage/ft - 9.50
 Lumens/Watt - 120

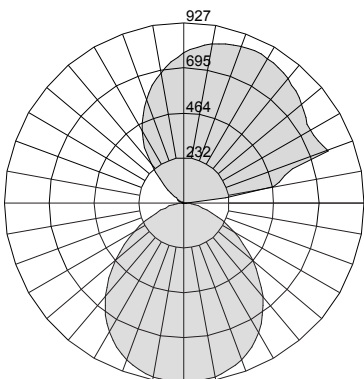

Cat. # RW4-4B-05L35-...-FRF-...-4'-ASYM
 Frosted Flush Lens
 Wattage/ft - 9.50
 Lumens/Watt - 119

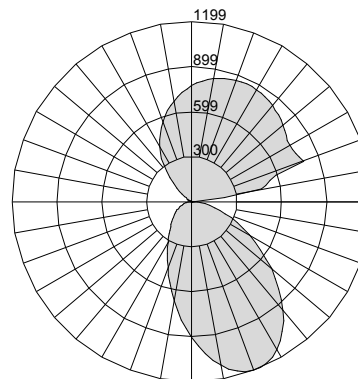

Specifications and dimensions are subject to change without notification.

2016 Rev. D1