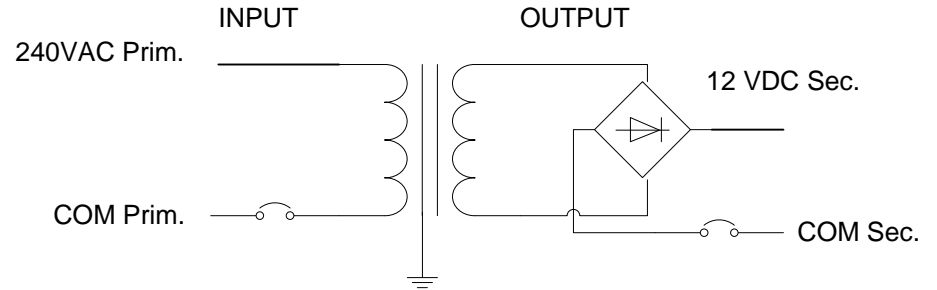


**NOTES:**

1. Output voltage in table 1 with 240VAC applied and fully loaded.
2. Maximum no load input current : 0.07A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 35VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminals are terminal block.
7. The transformer uses a class B (130°C) UL recognized insulation system E164279 MD.N66.130.00.
8. The transformer has a thermal self-reset 5 A circuit breaker on the secondary side and 0.8A on the primary side.
9. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
10. The removable wiring compartment is secured in place by clips and one screw.
11. The enclosure is black powder coated.
13. The label contains Technomagnet's catalog number and electrical rating.



**Table 1.**

Output Volts	
120AC	
12DC	

		15547 Cabrito Road Unit A Van Nuys, CA 91406													
				Interactive Lighting Servers											
<table border="1"> <tr> <td>Name</td> <td>Date</td> <td></td> </tr> <tr> <td>DRW.</td> <td></td> <td></td> </tr> <tr> <td>CHK.</td> <td></td> <td></td> </tr> <tr> <td>APR.</td> <td></td> <td></td> </tr> </table>		Name	Date		DRW.			CHK.			APR.			Page 1 Of 1	Scale: no scale Tolerance: ±
Name	Date														
DRW.															
CHK.															
APR.															
Part #TMC35S12DC240E Rev. A		Title: Compact indoor 12VDC 35VA Low voltage Transformer.													