


Two keyholes and two additional knockouts on the back

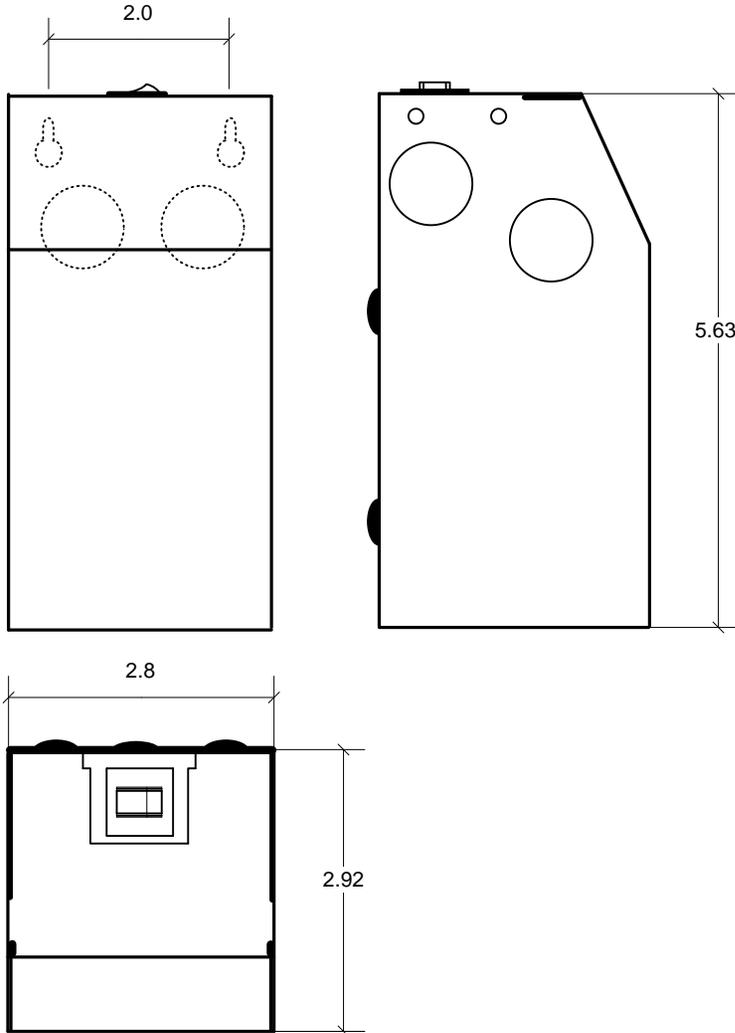

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.3A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 75VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition. Dimmers for magnetic transformers are recommended
6. Input and output leads are 18 AWG. 600V. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 5A circuit breaker on the secondary side.
9. Wiring compartment has 4 side and 2 back knockouts sized for 3/4 inch screw cable connectors.
10. The removable cover for the wiring compartment is secured in place by clips.
11. The enclosure is black powder coated.
12. The Transformer is UL listed. UL file number: E194005. model: c-150
13. The label contains Technomagnet's catalog number and electrical rating.
14. The boost tap option is indicated by the marked check box on the label.

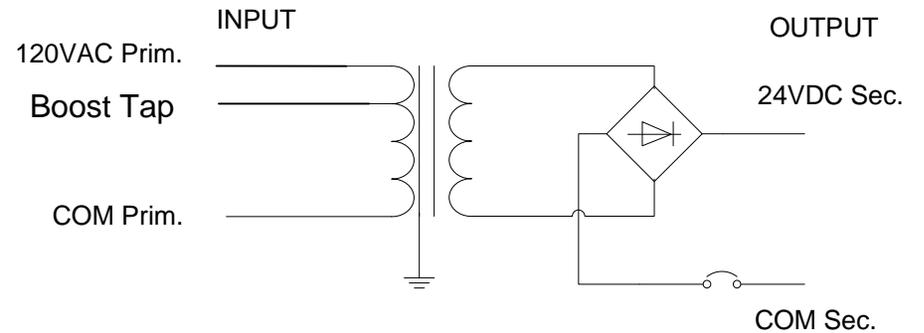


Table 1.

Output Volts	
120AC	Boost
23.8	24.8

		15547 Cabrito Road Van Nuys, CA 91406	
Name _____ Date _____		Page 1 Of 1	Scale: no scale Tolerance: ±
DRW. _____		Title: Compact indoor 24VDC 75VA Low voltage Transformer.	
CHK. _____			
APR. _____			
Part #TMC – 75S24DC		Rev. A	