




FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **12180 Lineo Architectural LED Suspended Linear Luminaire** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The integrated LED Lineo is available in its standard length of 4' (48").

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Mounting:** Field Adjustable Aircraft 5 Wire Power Cable System for a Variety of Heights Including Sloped Ceilings
- Lumens:** 3779
- Wattage:** 37W
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Dimming:** 0-10V Dimming (Requires 5 wire control)
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- CRI:** 85+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cETL, CA Title 24 Compliant, LED Chips Tested to LM-80 Standards
- Beam Angle:** 240 degrees
- Dimensions:** 48"W x 2.25"L x 3.25"H

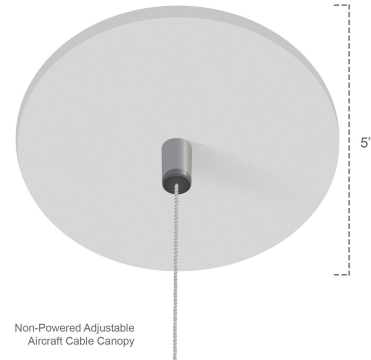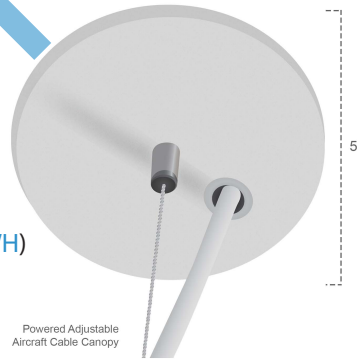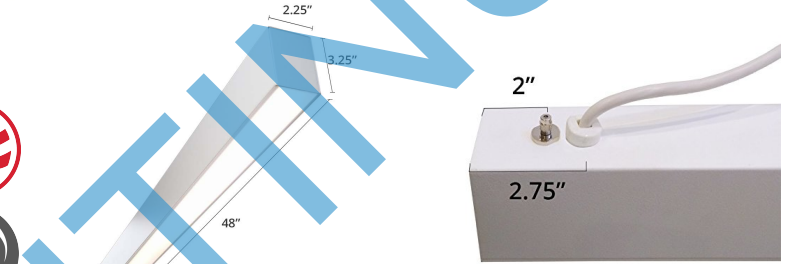

ORDERING INFORMATION

Example: (12180-30K-WH)

Model	Color Temperature	Finish
12180	30K - 3000K	WH - White
	35K - 3500K	BK - Black*
	40K - 4000K	SL - Silver
		RD - Red
		GR - Green
		BL - Blue

*Canopies come in Black Finish.