

FIXTURE SPECIFICATIONS

INTENDED USE

The Alcon Lighting Aces Architectural LED Center Basket Troffer provides soft ambient light with reduced shadows and glare combined with high performance. The Aces Series is excellent for recessed applications in commercial, industrial, and institutional buildings and is ideal for schools, hospitals, and offices.

AVAILABLE SIZES

2x2 | W 23.81" x L 24" x D 5.5"

2x4 | W 23.81" x L 48" x D 5.5"

FEATURES

Construction: Die Formed, Cold-Rolled, 20 Gauge Steel Corrosion Resistant Sloped Sides to Softly Reflect Light Back Downwards

Mounting: Recessed Mounted in Exposed T-bar Ceilings

Finish: High-Gloss Baked White Enamel

Lens: Ribbed Prism White Translucent Acrylic

Voltage: 120-277V (50/60 Hz) Constant Current

Universal Dimming: TRIAC (Forward-Phase), ELV (Reverse-Phase), 0-10V

Efficacy: 162 LPW

CRI: 80+


Life: L70 - 60,000 Hours

Ambient Operating Temperature: -22°F ~ 122°F

Power Factor: +0.9

Listing: Suitable for Damp Locations, UL/CUL listed and labeled, Made in the USA, ARRA Compliant

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

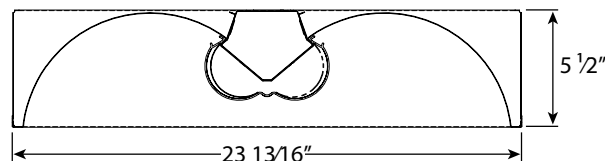

ORDERING INFORMATION Example: (14032-22-22-28-30K)

Model	Size	Wattage Lumens	Color Temperature	Options
14032	22 2x2	28 28 Watts, 2264 lms	30K	FK
		36 36 watts, 2860 lms	3000K	Flange Kit (Field Installed)
		44 44 watts, 3456 lms	35K	EM5
			3500K	5W Emergency Ballast
	24 2x4	44 44 Watts, 3456 lms	40K	EM8
		56 56 Watts, 4350 lms	4000K	8W Emergency Ballast
		57 68 Watts, 5244 lms	50K	EM16
			5000K	16W Emergency Ballast