

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The Alcon Lighting **Catania** Architectural LED Directional Up Light Fixture features naturally etched finishes capable of withstanding the test of time. The Catania Directional Uplights are ideal for architectural landscape lighting applications.

DETAILS

L 5.25" x Dia 1.75"

Construction: Corrosion Resistant Cast Brass with adjustable and extendable shroud

Lens: Clear and heat resistant tempered flat glass

Wiring: Prewired with a 5' 18-2 SPT2-W direct burial cord

Socket: Top grade fixed ceramic bi-pin with retention clip

Gasket: Silicone gasket for water tight seal

Knuckle: Adjustable brass knuckle with thumb screw. 1/2" NPT threaded male hub on bottom

Mounting: Standard injection molded spike with 1/2" NPT threaded female hub (1/2" NPT Spike included)

Electrical: Remote 12V transformer required (Not included)

Halogen Equivalent: MR11, 35W

Voltage: 12V AC/DC

Wattage: 2.5W

Lumens: 180 lms

Beam Spread: 38° Flood

Color Temperature: 2700K

CRI: 80

Ambient Temperature: -22°F - 122°F

Life: 40,000 Hrs

Warranty: Limited Lifetime Warranty
5 Year Limited Warranty on LED



Mounting Accessories:





Mounting Stem



Mounting Canopy



Mounting Pedestal

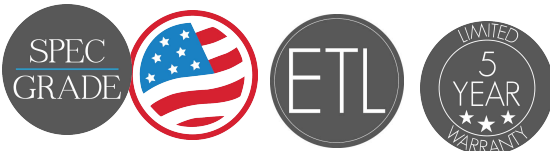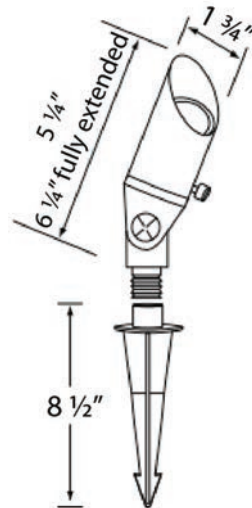

ORDERING INFORMATION

Example: (9013-BZ)

Model	Finish	Mounting	Options
9013	BZ Bronze	(Blank) 1/2" NPT Spike Included	UWC Universal Wire Connector
	GM Gun Metal	MC Mounting Canopy 6"	
		MS6 Mounting Stem 12"	
		MS12 Mounting Stem 18"	
		MS18 Mounting Stem	
		MS24 24" Mounting Stem 18"	
		MP Mounting Pedestal (Black Finish)	