

FEATURES & SPECIFICATIONS

INTENDED USE

The Alcon Lighting **Elite** Architectural LED Center Basket Troffer is designed to reflect light from its matte surface to provide a glare-free, softened "sky light" appearance where abundant and comfortable lighting is needed. The Elite series is configured for recessed applications in commercial and industrial buildings and is ideal for schools and offices.

DETAILS

**W** 23.94" x **L** 23.75" x **H** 5.5"

**Construction:** Die-formed, cold-rolled heavy gauge steel housing

Corrosion Resistant

**Mounting:** Recessed mount in expose T-Bar ceilings

ADDITIONAL FEATURES

**Voltage:** 120-277

**Wattage:** 27W

**CRI:** 83+

**Dimming:** 0-10V 1%~100%

**Life:** L70 - 50,000 Hours

**Operating Temperature:** -4°F ~ 122°F


**Power Factor:** +0.9

**Efficiency:** +85%

**THD:** <20

**Listing:** Suitable for damp locations

IC RATED

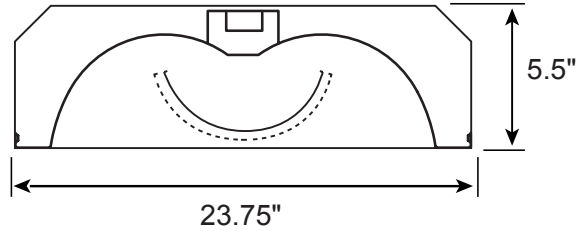

Ordering Information:

Example: (24001-PD-40K)

Model	Lens/Lumens	Color Temp
<input type="text" value="24001"/>	<input type="text" value="PD Perforated Metal Diffuser / 1727 lms"/>	<input type="text" value="30K 3000K"/>
	<input type="text" value="RA Ribbed Acrylic Diffuser / 2682 lms"/>	<input type="text" value="35K 3500K"/>
		<input type="text" value="40K 4000K"/>
		<input type="text" value="50K 5000K"/>