

FIXTURE SPECIFICATIONS

INTENDED USE

With up to 14,760 Lumens of LED Lighting, the Hudson 15204 Architectural High Bay LED Pendant Light Fixture is the ideal solution for warehouse, gymnasium, or other high-ceiling applications where high-output led lighting is desired.

FEATURES

Construction: Heavy-gauge spun aluminum driver enclosure for efficient heat dissipation

Reflector: Prismatic Acrylic

Input Voltage: 120-277V

CRI: 70+ Standard, 90+ Optional

Dimming: 0-10V Dimming to 10%

Operating Temperature: -40°C to +45°C

Power Factor: >0.90;

Total Harmonic Distortion (THD): <20%

Life: 160,000 Hours (L90)

Warranty: 10 Year Warranty

Listings: ETL, DLC




ORDERING INFORMATION Example: (15204-16-40-30K-W-C48)

Model	Size Wattage Lumens	Color Temperature
15204 High bay	16-40 16" 40 Watts 4900 Lumens	30K 3000K
	16-60 16" 60 Watts 7380 Lumens	
	22-80 22" 80 Watts 9840 Lumens	
	22-120 22" 120 Watts 14,760 Lumens	
		35K 3500K
		40K 4000K
		50K 5000K

Options

G	Wire Guard
9	90+ CRI

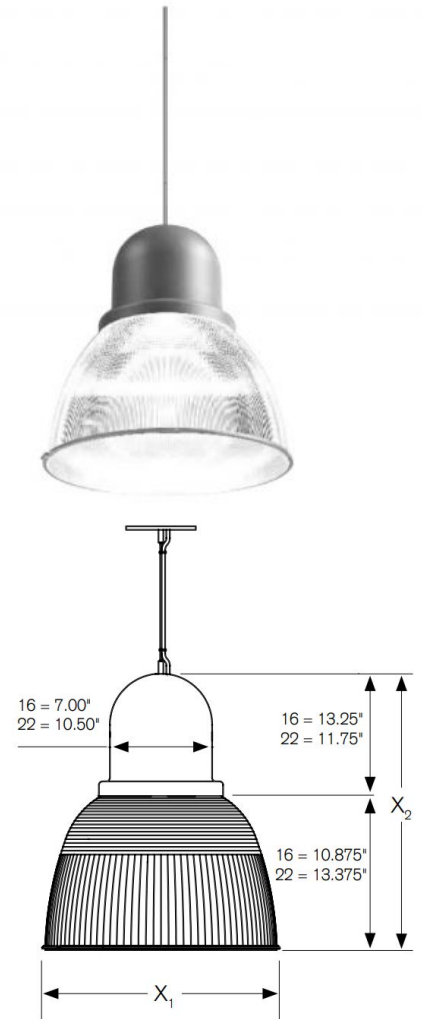

Finish	Mounting
W White	C48 48" Adjustable Aircraft Canopy
B Black	
BK Textured Black	C96 96" Adjustable Aircraft Canopy
BR Textured Bronze	
WH Textured White	C150 150" Adjustable Aircraft Canopy